


ECX-BW00

Single Board Computer in Intel® ECX Form Factor
with Intel® Braswell SoC Quad Core Processor,
Celeron® N3160

User's Guide

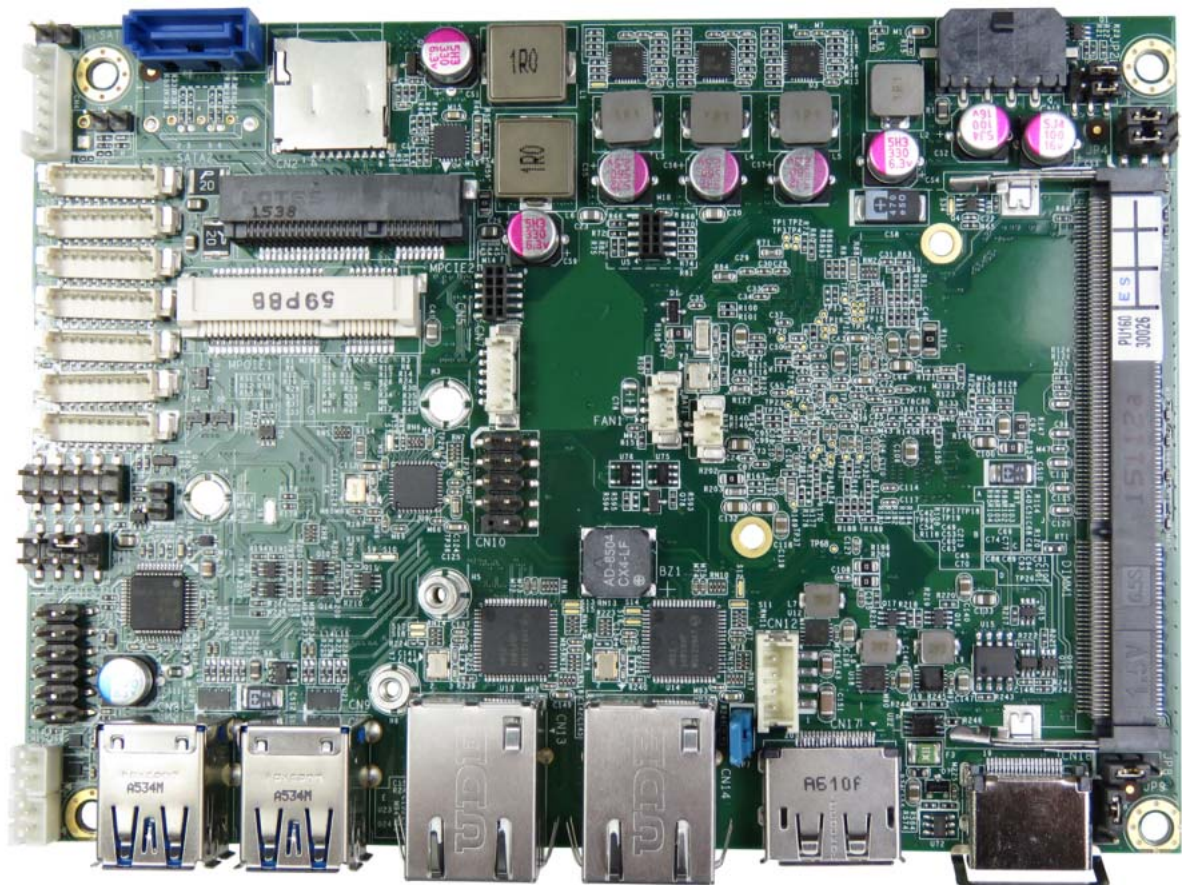

Contact Info: **Quanmax Inc.**
4F, No. 415, Ti-Ding Blvd. Sec. 2 NeiHu District,
Taipei 114 Taiwan
Tel: +886-2-2799-2789
Fax: +886-2-2799-7399

Visit our site at: **www.quanmax.com**

© 2016 Quanmax Inc. All rights reserved.

The information in this user's guide is provided for reference only. Quanmax does not assume any liability arising out of the application or use of the information or products described herein. This user's guide may contain or reference information and products protected by copyrights or patents and does not convey any license under the patent rights of Quanmax, nor the rights of others.

Quanmax is a registered trademark of Quanmax. All trademarks, registered trademarks, and trade names used in this user's guide are the property of their respective owners. All rights reserved. This user's guide contains information proprietary to Quanmax. Customers may reprint and use this user's guide in other publications. Customers may alter this user's guide and publish it only after they remove the Quanmax name, cover, and logo.

Quanmax reserves the right to make changes without notice in product or component design as warranted by evolution in user needs or progress in engineering or manufacturing technology.

Changes which affect the operation of the unit will be documented in the next revision of this user's guide.

Content

Content.....	3
Figures	5
Tables	6
Safety Instructions.....	8
Before You Begin.....	8
When Working Inside a Computer.....	8
Preventing Electrostatic Discharge.....	9
Preface.....	11
How to Use This Guide.....	11
Unpacking.....	11
Regulatory Compliance Statements	11
Warranty Policy	12
Maintaining Your Computer.....	13
Chapter 1 Introduction	16
Overview	16
Product Specifications.....	17
System Block Diagram.....	18
Mechanical Dimensions.....	19
Chapter 2 Hardware Settings	20
Overview	20
Jumper Settings and Pin Definitions.....	21
Jumper Settings.....	22
Internal Connector Pin Assignment.....	24
Rear Panel Pin Assignments	33
Chapter 3 System Installation.....	36
Memory Module Installation.....	36
Chapter 4 AMI BIOS Setup	38
Overview	38
Main Menu	39
Advanced Menu	40
Power Menu.....	53
Security Menu	54
Boot Menu.....	55
Save & Exit Menu	56

Content

Chapter 5 Driver Installation	58
Appendix A DIO (Digital I/O) Sample Code.....	59
Appendix B WatchDog Timer Sample Code.....	62

Figures

<i>Figure 1 Block Diagram.....</i>	<i>18</i>
<i>Figure 2 Mechanical Dimensions.....</i>	<i>19</i>
<i>Figure 3 Jumper Connector.....</i>	<i>20</i>
<i>Figure 4 Jumper and Connector Locations.....</i>	<i>21</i>
<i>Figure 5 Rear Panel IO.....</i>	<i>33</i>
<i>Figure 6 Align the SO-DIMM Memory Module with the onboard socket.....</i>	<i>36</i>
<i>Figure 7 Press down on the SO-DIMM Memory Module to lock it in place.....</i>	<i>37</i>

Tables

Table 1 ECX-BW00 Specification.....	17
Table 2 Jumper List.....	22
Table 3 JP1 RTC Reset Selection	22
Table 4 JP2 Backlight Enable Selection.....	22
Table 5 JP4 Panel & Backlight Power Selection	22
Table 6 JP6 USB Power Selection	23
Table 7 JP7 ME F/W Selection.....	23
Table 8 JP8 Keyboard Lock Selection	23
Table 9 JP9 AT / ATX Power Mode Selection	23
Table 10 BAT1 CR2032 Battery Power Input Wafer	25
Table 11 CN1 DC12V Power Input Wafer.....	25
Table 12 CN2 Micro-SD Card Cage	25
Table 13 CN3 eDP Panel Connector.....	26
Table 14 CN4 PS/2 Keyboard / Mouse Wafer	26
Table 15 CN6 VGAHeader.....	26
Table 16 CN7 SIM Interface Wafer for MPCIE1	27
Table 17 CN10 USB2.0 Port DN_1, DN_2 Pin Header.....	27
Table 18 CN11 Digital Input / Output Wafer	27
Table 19 CN12 HDD Power Output Wafer	27
Table 20 CN15 Audio Input / Output Pin Header.....	28
Table 21 CN16 Left Channel 3W Audio AMP Output Wafer	28
Table 22 CN19 Right Channel 3W Audio AMP Output Wafer	28
Table 23 CN20 COM1 RS-232/422/485 Port Wafer	28
Table 24 CN21 COM2 RS-232/422/485 Port Wafer	29
Table 25 CN22~CN25 COM3~6 RS-232 Port Wafer.....	29
Table 26 CN27 MPCIE Activity LED Pin Header.....	29
Table 27 FAN1 DC5V FAN Wafer	29
Table 28 FP1 Front Panel 1 Pin Header.....	30
Table 29 FP2 Front Panel 2 Pin Header.....	30
Table 30 MPCIE1 Mini-PCI Express v1.2 Socket (Full Size)	31
Table 31 MSATA1 Serial ATA Port 1 mSATA Socket (Full Size, optional for MPCIE2)	32
Table 32 SATA1 Serial ATA Port 0 Connector.....	32
Table 33 SATA2 Serial ATA Port 1 Connector (default unmounted).....	32

Tables

Table 34 Rear Panel Connector List.....	33
Table 35 CN13 GbE LAN1 RJ-45 Connector.....	33
Table 36 CN14 GbE LAN2 RJ-45 Connector.....	33
Table 37 CN8 USB3.0 Port-0,1 Type-AConnector.....	34
Table 38 CN9 USB3.0 Port-2,3 Type-AConnector.....	34
Table 39 CN17 DisplayPort Connector.....	34
Table 40 CN18 HDMI Connector.....	35
Table 41 ECX-BT00 BIOS Main Menu.....	39
Table 42 Advanced Menu.....	40
Table 43 Advanced Menu – Display Configuration.....	41
Table 44 Advanced Menu – Super IO Configuration.....	42
Table 45 Advanced Menu – Super IO Configuration – Serial Port 1 Configuration.....	42
Table 46 Advanced Menu – Super IO Configuration – Serial Port 2 Configuration.....	43
Table 47 Advanced Menu – Super IO Configuration – Serial Port 3 Configuration.....	44
Table 48 Advanced Menu – Super IO Configuration – Serial Port 4 Configuration.....	45
Table 49 Advanced Menu – Super IO Configuration – Serial Port 5 Configuration.....	46
Table 50 Advanced Menu – Super IO Configuration – Serial Port 6 Configuration.....	47
Table 51 Advanced Menu – CPU Chipset Configuration.....	48
Table 52 Advanced Menu –SATA Configuration.....	49
Table 53 Advanced Menu – USB Configuration.....	50
Table 54 Advanced Menu – DIO Configuration.....	51
Table 55 Advanced Menu – H/W Monitor.....	52
Table 56 Power Configuration.....	53
Table 57 Security Menu.....	54
Table 58 Boot Menu.....	55
Table 59 Save & Exit Menu.....	56

Safety Instructions

■ Before You Begin

Before handling the product, read the instructions and safety guidelines on the following pages to prevent damage to the product and to ensure your own personal safety. Refer to the “Advisories” section in the Preface for advisory conventions used in this user’s guide, including the distinction between Warnings, Cautions, Important Notes, and Notes.

- Always use caution when handling/operating a computer. Only qualified, experienced, authorized electronics service personnel should access the interior of a computer. The power supplies produce high voltages and energy hazards, which can cause bodily harm.
- Use extreme caution when installing or removing components. Refer to the installation instructions in this user’s guide for precautions and procedures. If you have any questions, please contact Quanmax Post-Sales Technical Support.

WARNING



High voltages are present inside the chassis when the unit’s power cord is plugged into an electrical outlet. Turn off system power, turn off the power supply, and then disconnect the power cord from its source before removing the chassis cover. Turning off the system power switch does not remove power to components.

■ When Working Inside a Computer

Before taking covers off a computer, perform the following steps:

1. Turn off the computer and any peripherals.
2. Disconnect the computer and peripherals from their power sources or subsystems to prevent electric shock or system board damage. This does not apply when hot swapping parts.

3. Follow the guidelines provided in “Preventing Electrostatic Discharge” on the following page.
4. Disconnect any telephone or telecommunications lines from the computer.

In addition, take note of these safety guidelines when appropriate:

- To help avoid possible damage to system boards, wait five seconds after turning off the computer before removing a component, removing a system board, or disconnecting a peripheral device from the computer.
- When you disconnect a cable, pull on its connector or on its strain-relief loop, not on the cable itself. Some cables have a connector with locking tabs. If you are disconnecting this type of cable, press in on the locking tabs before disconnecting the cable. As you pull connectors apart, keep them evenly aligned to avoid bending any connector pins. Also, before connecting a cable, make sure both connectors are correctly oriented and aligned.

CAUTION



Do not attempt to service the system yourself except as explained in this user's guide. Follow installation and troubleshooting instructions closely.

■ Preventing Electrostatic Discharge

Static electricity can harm system boards. Perform service at an ESD workstation and follow proper ESD procedure to reduce the risk of damage to components. Quanmax strongly encourages you to follow proper ESD procedure, which can include wrist straps and smocks, when servicing equipment. You can also take the following steps to prevent damage from electrostatic discharge (ESD):

- When unpacking a static-sensitive component from its shipping carton, do not remove the component's antistatic packing material until you are ready to install the component in a computer. Just before unwrapping the antistatic packaging, be sure you are at an ESD workstation or grounded. This will discharge any static electricity that may have built up in your body.

Safety Instructions

- When transporting a sensitive component, first place it in an antistatic container or packaging.
- Handle all sensitive components at an ESD workstation. If possible, use antistatic floor pads and workbench pads.
- Handle components and boards with care. Don't touch the components or contacts on a board. Hold a board by its edges or by its metal mounting bracket.
- Do not handle or store system boards near strong electrostatic, electromagnetic, magnetic, or radioactive fields.

Preface

■ How to Use This Guide

This guide is designed to be used as step-by-step instructions for installation, and as a reference for operation, troubleshooting, and upgrades.

NOTE



Driver downloads and additional information are available under Downloads on our web site: www.quanmax.com.

■ Unpacking

When unpacking, follow these steps:

1. After opening the box, save it and the packing material for possible future shipment.
2. Remove all items from the box. If any items listed on the purchase order are missing, notify Quanmax customer service immediately.
3. Inspect the product for damage. If there is damage, notify Quanmax customer service immediately. Refer to “Warranty Policy” for the return procedure.

■ Regulatory Compliance Statements

This section provides the FCC compliance statement for Class A devices.

FCC Compliance Statement for Class A Devices

The product(s) described in this user's guide has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the user's guide, may cause harmful interference to radio communications. Operation of this equipment in a residential

area (domestic environment) is likely to cause harmful interference, in which case the user will be required to correct the interference (take adequate measures) at their own expense.

Changes or modifications not expressly approved by Quanmax could void the user's authority to operate the equipment.

NOTE



The assembler of a personal computer system may be required to test the system and/or make necessary modifications if a system is found to cause harmful interference or to be noncompliant with the appropriate standards for its intended use.

■ Warranty Policy

Limited Warranty

Quanmax Inc.'s detailed Limited Warranty policy can be found under Support at www.quanmax.com. Please consult your distributor for warranty verification.

The limited warranty is void if the product has been subjected to alteration, neglect, misuse, or abuse; if any repairs have been attempted by anyone other than Quanmax or its authorized agent; or if the failure is caused by accident, acts of God, or other causes beyond the control of Quanmax or the manufacturer. Neglect, misuse, and abuse shall include any installation, operation, or maintenance of the product other than in accordance with the user's guide.

No agent, dealer, distributor, service company, or other party is authorized to change, modify, or extend the terms of this Limited Warranty in any manner whatsoever.

Quanmax reserves the right to make changes or improvements in any product without incurring any obligation to similarly alter products previously purchased.

Return Procedure

For any Limited Warranty return, please contact Support at www.quanmax.com and login to obtain a Return Material Authorization (RMA) Number. If you do not have an account, send an email to support@quanmax.com to apply for one.

All product(s) returned to Quanmax for service or credit must be accompanied by a Return Material Authorization (RMA) Number. Freight on all returned items must be prepaid by the customer who is responsible for any loss or damage caused by common carrier in transit. Returns for Warranty must include a Failure Report for each unit, by serial number(s), as well as a copy of the original invoice showing the

date of purchase.

To reduce risk of damage, returns of product must be in a Quanmax shipping container. If the original container has been lost or damaged, new shipping containers may be obtained from Quanmax Customer Service at a nominal cost. Quanmax owns all parts removed from repaired products. Quanmax uses new and reconditioned parts made by various manufacturers in performing warranty repairs and building replacement products. If Quanmax repairs or replaces a product, its warranty term is not extended.

Shipments not in compliance with this Limited Warranty Return Policy will not be accepted by Quanmax.

Limitation of Liability

In no event shall Quanmax be liable for any defect in hardware, software, loss, or inadequacy of data of any kind, or for any direct, indirect, incidental, or consequential damages in connection with or arising out of the performance or use of any product furnished hereunder. Quanmax's liability shall in no event exceed the purchase price of the product purchased hereunder. The foregoing limitation of liability shall be equally applicable to any service provided by Quanmax or its authorized agent.

■ Maintaining Your Computer

Environmental Factors

■ Temperature

The ambient temperature within an enclosure may be greater than room ambient temperature. Installation in an enclosure should be such that the amount of air flow required for safe operation is not compromised.

Consideration should be given to the maximum rated ambient temperature.

Overheating can cause a variety of problems, including premature aging and failure of chips or mechanical failure of devices.

If the system has been exposed to abnormally cold temperatures, allow a two-hour warm-up period to bring it up to normal operating temperature before turning it on. Failure to do so may cause damage to internal components, particularly the hard disk drive.

■ Humidity

High-humidity can cause moisture to enter and accumulate in the system. This moisture can cause corrosion of internal components and degrade such

properties as electrical resistance and thermal conductivity. Extreme moisture buildup inside the system can result in electrical shorts, which can cause serious damage to the system.

Buildings in which climate is controlled usually maintain an acceptable level of humidity for system equipment. However, if a system is located in an unusually humid location, a dehumidifier can be used to maintain the humidity within an acceptable range. Refer to the “Specifications” section of this user’s guide for the operating and storage humidity specifications.

■ **Altitude**

Operating a system at a high altitude (low pressure) reduces the efficiency of the cooling fans to cool the system. This can cause electrical problems related to arcing and corona effects. This condition can also cause sealed components with internal pressure, such as electrolytic capacitors, to fail or perform at reduced efficiency.

Power Protection

The greatest threats to a system’s supply of power are power loss, power spikes, and power surges caused by electrical storms, which interrupt system operation and/or damage system components. To protect your system, always properly ground power cables and one of the following devices.

■ **Surge Protector**

Surge protectors are available in a variety of types and usually provide a level of protection proportional with the cost of the device. Surge protectors prevent voltage spikes from entering a system through the AC power cord. Surge protectors, however, do not offer protection against brownouts, which occur when the voltage drops more than 20 percent below the normal AC line voltage level.

■ **Line Conditioner**

Line conditioners go beyond the over voltage protection of surge protectors. Line conditioners keep a system’s AC power source voltage at a fairly constant level and, therefore, can handle brownouts. Because of this added protection, line conditioners cost more than surge protectors. However, line conditioners cannot protect against a complete loss of power.

■ **Uninterruptible Power Supply**

Uninterruptible power supply (UPS) systems offer the most complete protection against variations on power because they use battery power to keep the server running when AC power is lost. The battery is charged by the AC power while it is available, so when AC power is lost, the battery can provide power to the system for a limited amount of time, depending on the UPS system.

UPS systems range in price from a few hundred dollars to several thousand dollars, with the more expensive units allowing you to run larger systems for a longer period of time when AC power is lost. UPS systems that provide only 5 minutes of battery power let you conduct an orderly shutdown of the system, but are not intended to provide continued operation. Surge protectors should be used with all UPS systems, and the UPS system should be Underwriters Laboratories (UL) safety approved.

Chapter 1

Introduction

■ Overview

The ECX-BW00 is an ECX form factor single board computer equipped with Intel's latest Braswell SoC Quad Core Processor, Celeron® N3160, providing a performance-improved option for power-efficient platform finders. It supports triple display configuration from its 1x eDP, 1x HDMI and 1x DP outputs. In addition, it features 4x USB3.0, 2x USB2.0, 6x COM, 1x 8-bit DIO for peripheral applications, 2x LAN, 1x mPCIe expansion slot for wired / wireless connectivity, and 1x SATA, 1x mSATA, 1x Micro SD card cage for storage support.

Checklist (* : Optional)

- Driver/ Manual CD
- Quick Installation Guide
- ECX-BW00 embedded board
- 1x SATA Cable*
- 1x SATA Power Cable*
- 1x DC Jack Cable*

Features

- Intel® Braswell SoC Quad Core Processor, Celeron® N3160
- 1x DDR3L 1600 SO-DIMM
- 1x SATA, 1x mSATA, 1x Micro-SD Card Cage for storage
- 1x eDP, 1x HDMI, 1x DP for display output
- Triple display support
- 2x LAN, 1x mPCIe for network connection and expansion
- 4x USB3.0, 2x USB2.0, 6x COM, 1x 8-bit DIO for peripheral connection

■ Product Specifications

Model Name	▪ ECX-BW00
Form Factor	▪ ECX, 146x105mm
CPU Support	▪ Intel® Celeron® N3160 (Quad Core, 2M Cache, up to 2.24 GHz, 6W TDP)
Memory	▪ 1x DDR3L 1600 SO-DIMM
Storage	▪ 1x SATA ▪ 1x mSATA (full size) ▪ 1x Micro SD Card Cage
Displays	▪ 1x eDP ▪ 1x HDMI (on rear) ▪ 1x DP (on rear) ▪ Triple Display
Ethernet	▪ 2x LAN (RJ-45 on rear, Intel® I210-AT)
Audio Chipset	▪ Realtek ALC662
Audio Interfaces	▪ 2x Speaker-out (3W) ▪ 1x Line-in (by header) ▪ 1x Line-out (by header) ▪ 1x Mic-in (by header)
USB	▪ 4x USB3.0 (Type A on rear) ▪ 2x USB2.0 (by header)
Serial Ports	▪ 2x RS-232/422/485 (by header) ▪ 4x RS-232 (by header)
Other I/O Ports	▪ 1x 8-bit DIO (by wafer)
Expansion Slot	▪ 1x mPCIe Socket (full size) ▪ 1x SIM card wafer
BIOS	▪ AMI uEFI BIOS
Hardware Monitor	▪ Voltages monitoring ▪ Temperature monitoring
Watchdog	▪ Programmable WDT to generate System reset event
Real Time Clock	▪ SoC integrated RTC
Power	▪ Connector: 1x4-pin Lockable Wafer ▪ Input Voltage: DC 12V
Operation Temp.	▪ Operation Temp.: 0°C ~ 60°C / 32°F ~ 140°F ▪ Storage Temp.: -20°C ~ 80°C / -4°F ~ 176°F ▪ Humidity: 0% ~ 95%
Certifications	▪ CE, FCC Class A

Table 1 ECX-BW00 Specification

■ System Block Diagram

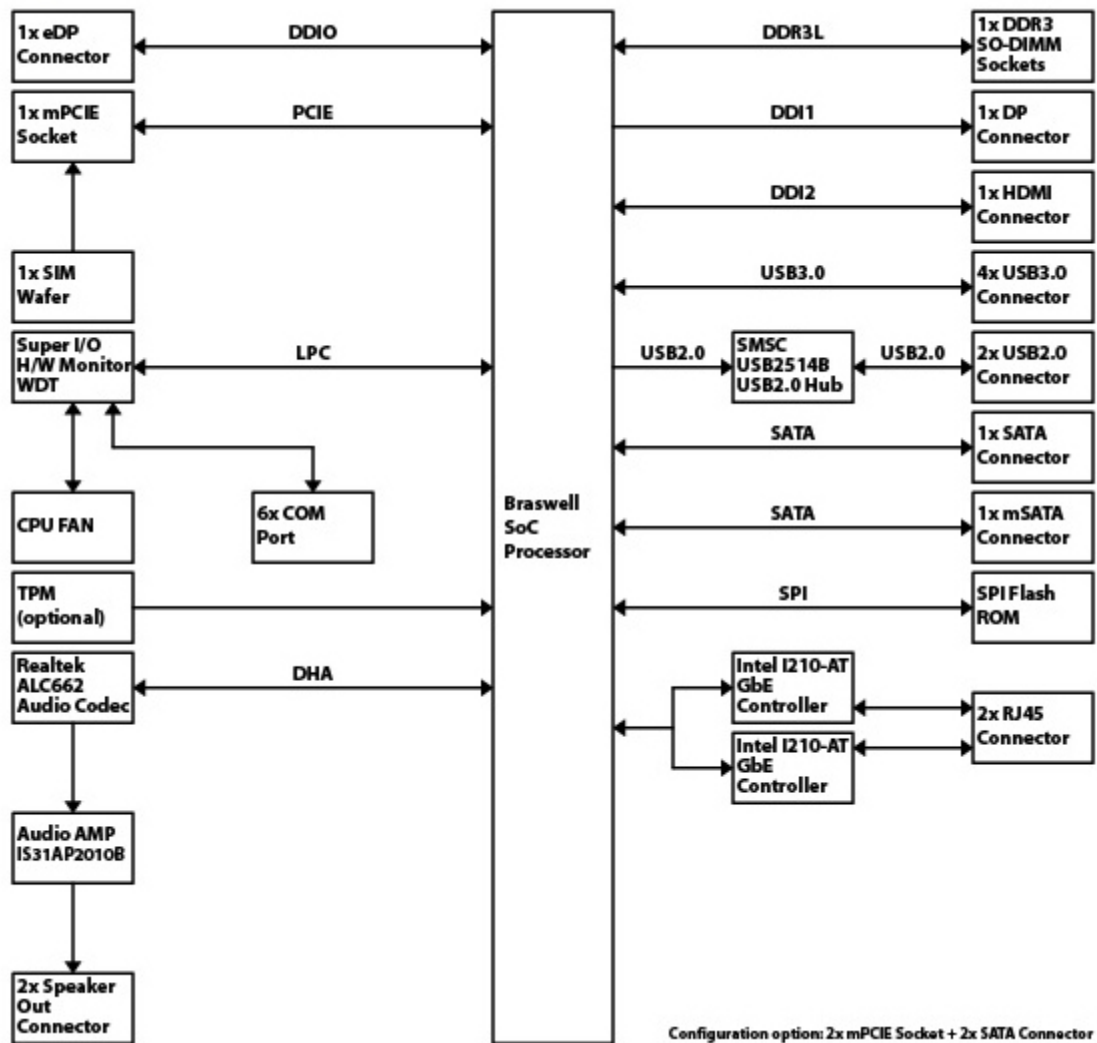


Figure 1 Block Diagram

■ Mechanical Dimensions

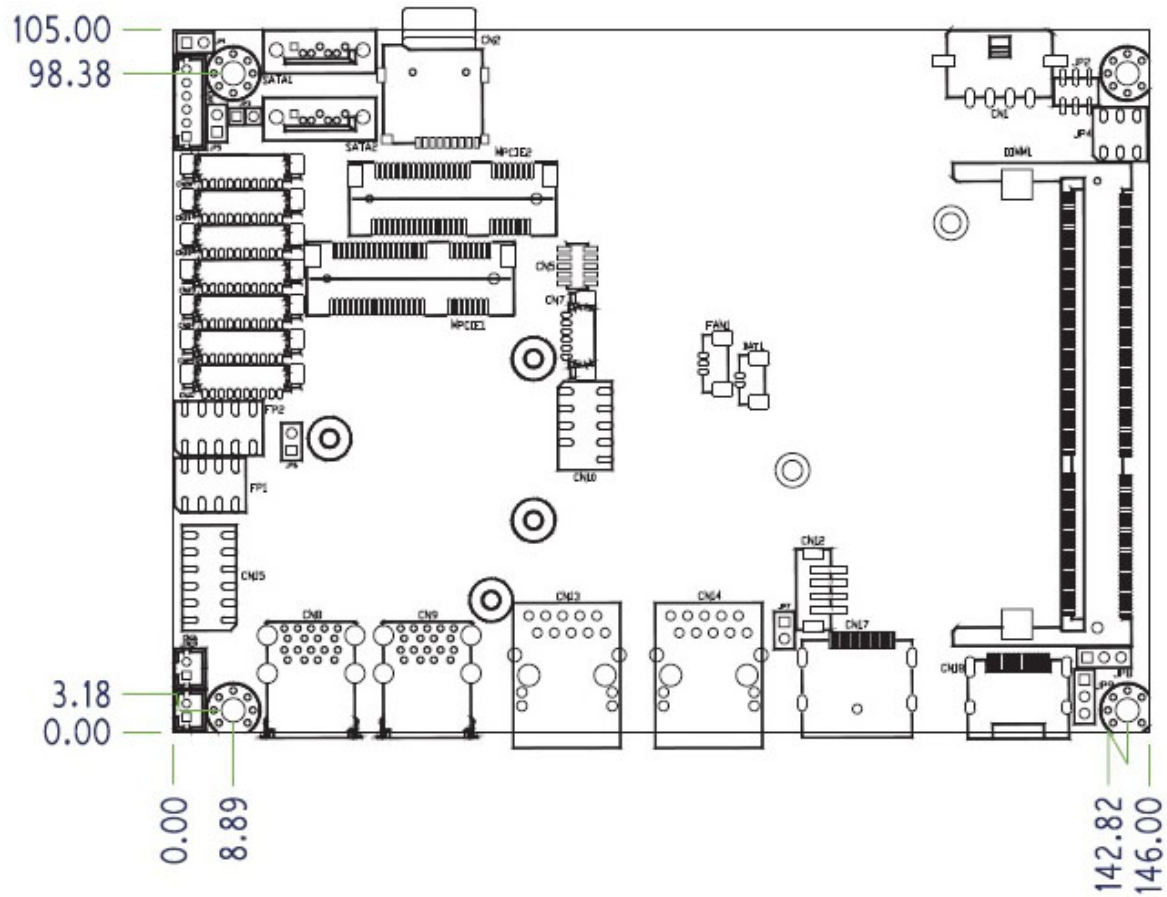


Figure 2 Mechanical Dimensions

Chapter 2

Hardware Settings

■ Overview

This chapter provides the definitions and locations of jumpers, headers, and connectors.

Jumpers

The product has several jumpers which must be properly configured to ensure correct operation.

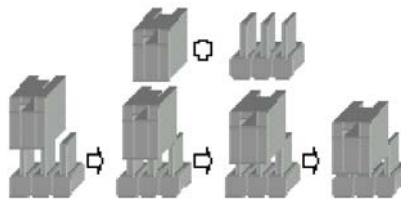


Figure 3 Jumper Connector

For a three-pin jumper (see *Figure 3*), the jumper setting is designated “1-2” when the jumper connects pins 1 and 2. The jumper setting is designated “2-3” when pins 2 and 3 are connected and so on. You will see that one of the lines surrounding a jumper pin is thick, which indicates pin No.1.

To move a jumper from one position to another, use needle-nose pliers or tweezers to pull the pin cap off the pins and move it to the desired position.

■ Jumper Settings and Pin Definitions

For jumper and connector locations, please refer to the diagrams below.

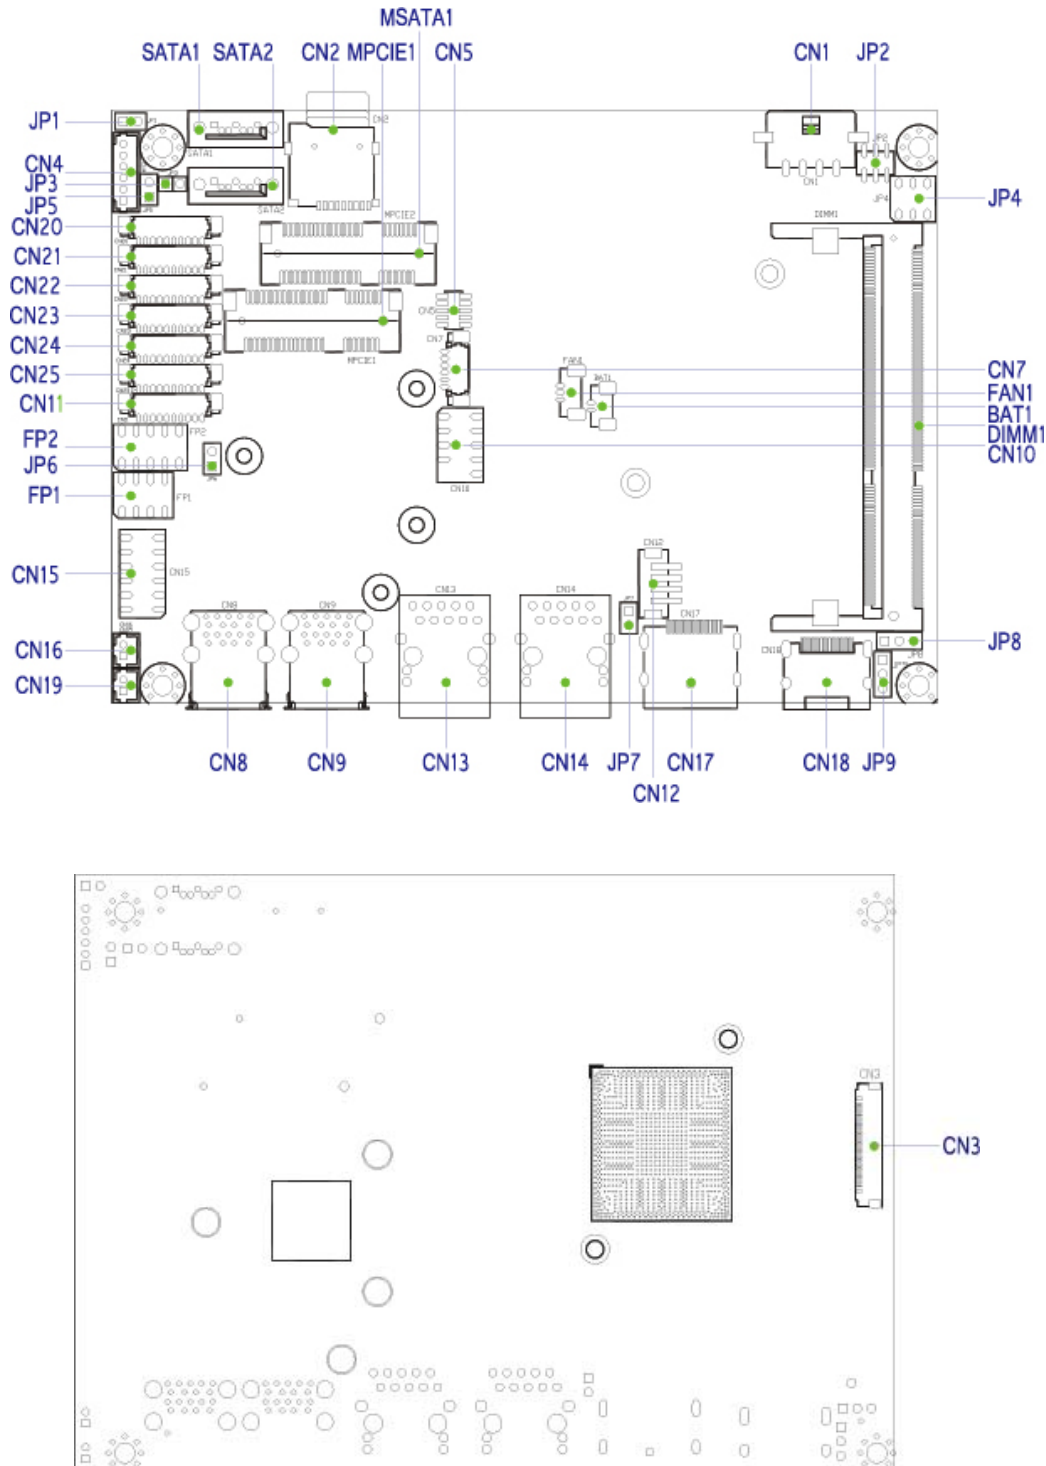


Figure 4 Jumper and Connector Locations

Jumper Settings

To ensure correct system configuration, the following section describes how to set the jumpers to enable/disable or change functions. For jumper descriptions, please refer to the table below.

Table 2 Jumper List

Label	Function
JP1	RTC Reset Selection
JP2	Backlight Enable Selection
JP4	Panel & Backlight Power Selection
JP6	USB Power Selection
JP7	ME F/W Selection
JP8	Keyboard Lock Selection
JP9	AT / ATX Power Mode Selection

Table 3 JP1 RTC Reset Selection


	Jumper	Status
	1-2 Open	Normal Operation.
	1-2 Short	Clear CMOS
DIP 2P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*02SAGR(6T)]		

Table 4 JP2 Backlight Enable Selection

<div><div><div>1</div><div>2</div></div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div>5</div><div>6</div></div></div>	Jumper	Setting	Status
	1	1-3	Backlight Enable Level = +3.3V
		3-5	Backlight Enable Level = +5V
	2	2-4	Backlight Enable High Active
		4-6	Backlight Enable Low Active
SMD 6P 2R MALE TYPE 180D P-2.0mm[PINREX 222-97-03GBB1]			

Table 5 JP4 Panel & Backlight Power Selection


	Jumper	Setting	Status
	1	1-3	Backlight Power = +12V
		3-5	Backlight Power = +5V
	2	2-4	Panel Power = +3.3V
		4-6	Panel Power = +5V
SMD 2*3P 3362*03SAGR TYPE 180D P-2.54mm [YIMTEX 3362*03SAGR]			

Table 6 JP6 USB Power Selection


<div> <div>1</div> <div>2</div>  </div>	Jumper	Status
	1-2 Open	USB power will be cut off in S4 & S5 state.
	1-2 Short	USB power is always supply.
	DIP 2P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*02SAGR(6T)]	

Table 7 JP7 ME F/W Selection


<div> <div>1</div> <div>2</div>  </div>	Jumper	Status
	1-2 Open	Normal Operation
	1-2 Short	ME F/W Disabled
	DIP 2P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*02SAGR(6T)]	

Table 8 JP8 Keyboard Lock Selection



<div> <div>1</div> <div>2</div> <div>3</div>  </div>	Jumper	Status
	1-2 Open	Normal Operation
	1-2 Short	Keyboard Lock
	DIP 3P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*03SAGR(6T)]	

Table 9 JP9 AT / ATX Power Mode Selection

<div> <div>1</div> <div>2</div> <div>3</div>  </div>	Jumper	Status
	1-2 Short	ATX Mode
	2-3 Short	AT Mode
	DIP 3P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*03SAGR(6T)]	

Internal Connector Pin Assignment

Label	Function
BAT1	CR2032 Battery Power Input Wafer
BZ1	Onboard Buzzer
CN1	DC12V Power Input Wafer
CN2	Micro-SD Card Cage
CN3	eDP Panel Connector
CN4	PS/2 Keyboard / Mouse Wafer
CN5	P80_Header
CN7	SIM Interface Wafer for MPCIE1
CN10	USB2.0 Port DN_1, DN_2 Pin Header
CN11	Digital Input / Output Wafer
CN12	HDD Power Output Wafer
CN15	Audio Input / Output Pin Header
CN16	Left Channel 3W Audio AMP Output Wafer
CN19	Right Channel 3W Audio AMP Output Wafer
CN20	COM1 RS-232/422/485 Port Wafer
CN21	COM2 RS-232/422/485 Port Wafer
CN22	RS-232 Port 3 Wafer
CN23	RS-232 Port 4 Wafer
CN24	RS-232 Port 5 Wafer
CN25	RS-232 Port 6 Wafer
CN27	MPCIE Activity LED Pin Header
DIMM1	DDR3 Memory SO-DIMM Socket
FAN1	DC5V FAN Wafer
FP1	Front Panel 1 Pin Header
FP2	Front Panel 2 Pin Header
MPCIE1	Mini-PCI Express v1.2 Socket (Full Size)
MSATA1	Serial ATA Port 1 mSATA Socket (Full Size, optional for MPCIE2)
SATA1	Serial ATA Port 0 Connector
SATA2	Serial ATA Port 1 Connector (default unmounted)

Table 10 BAT1 CR2032 Battery Power Input Wafer


	Pin	Signal Name
	1	Battery+
	2	Battery-
	SMD 2P 180D P-1.25mm WAFER [Pinrex 712-73-02TWR0]	

Table 11 CN1 DC12V Power Input Wafer


	Pin	Signal
	1	+12Vin
	2	GND
	3	GND
	4	+12Vin
	ATX POWER SMD 4P 1R MALE 90° Pitch:3.0mm Hollow PIN [PINREX 733-97-04TBR1]	

Table 12 CN2 Micro-SD Card Cage

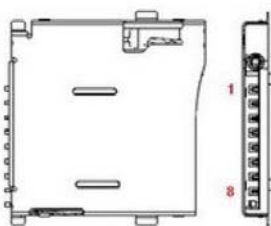
	Pin	Signal Name
	1	DAT2
	2	CD/DAT3
	3	CMD
	4	VDD
	5	CLK
	6	GND
	7	DAT0
	8	DAT1
	SMT 8P Micro-SD (T-Flash) Memory Card Connector, LCP, Black, Au 10u" Plated [HOMETOM SD08F36BDA005]	

Table 13 CN3 eDP Panel Connector


	Pin	Signal Name	Pin	Signal Name
	1	NC	16	GND
	2	GND	17	HPD
	3	LANE1_N	18	GND
	4	LANE1_P	19	GND
	5	GND	20	GND
	6	LANE0_N	21	GND
	7	LANE0_P	22	BL_Enable
	8	GND	23	PWM_ADJ
	9	AUX_CH_P	24	NC
	10	AUX_CH_N	25	NC
	11	GND	26	+VBL*
	12	+VPL*	27	+VBL*
	13	+VPL*	28	+VBL*
	14	NC	29	+VBL*
	15	GND	30	NC
SMD MALE 30P 90° 1R Pitch:0.5mm [HRS KN38A-30S-0.5H(800)]				
* : Panel Power & Backlight Power can be selected by JP4.				

Table 14 CN4 PS/2 Keyboard / Mouse Wafer


	Pin	Signal Name
	1	MSCLK
	2	VCC
	3	MSDAT*
	4	KBDAT
	5	GND
	6	KBCLK
DIP 6P 180° Pitch=2.0mm WAFER [YIMTEX 503PW1*06ST-1R]		

Table 15 CN6 VGAHeader

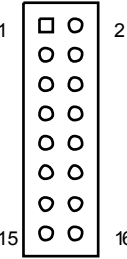
	Pin	Signal	Pin	Signal
	1	R	2	G
	3	B	4	NC
	5	GND	6	GND
	7	GND	8	GND
	9	+5V	10	GND
	11	NC	12	DDC_DATA
	13	HSYNC	14	VSNC
	15	DDC_CLK	16	NC
SMD 16P 2R MALE Straight Type Pitch:2.0mm, Gold Flash, Black Insulator [Pinrex 222-97-08GBB1]				

Table 16 CN7 SIM Interface Wafer for MPCIE1


	Pin	Signal Name
	1	UIM_PWR
	2	UIM_DATA
	3	UIM_RESET
	4	UIM_VPP
	5	UIM_CLK
	6	GND
SMD 6P 180D P-1.25mm WAFER [Pinrex 712-73-06TWB0]		

Table 17 CN10 USB2.0 Port DN_1, DN_2 Pin Header


	Pin	Signal Name	Pin	Signal Name
	1	+USBVCC	2	+USBVCC
	3	USB_A-	4	USB_B-
	5	USB_A+	6	USB_B+
	7	GND	8	GND
	9	KEY	10	GND
	SMD 10P 2R MALE STRAIGHT TYPE Pitch:2.54mm Remove PIN 9 NY 6T[YIMTEX 3362*05SANGR-09] * : The power source of +USBVCC can be selected by JP6.			

Table 18 CN11 Digital Input / Output Wafer


	Pin	Signal Name
	1	+5V
	2	DI0
	3	DO0
	4	DI1
	5	DO1
	6	DI2
	7	DO2
	8	DI3
	9	DO3
	10	GND
SMD 10P 1R 180D MALE P=1.25mm, Tin Plated, NY46, White Insulator [Pinrex 712-73-10TWB0]		

Table 19 CN12 HDD Power Output Wafer


	Pin	Signal
	1	+12V
	2	GND
	3	GND
	4	+5V
SMD MALE 4P 1R 180D P-2.0mm, Tin Plated, White Insulator [PINREX 721-93-04TWE9]		

Table 20 CN15 Audio Input / Output Pin Header


	Pin	Signal Name	Pin	Signal Name
	1	MIC-In_L	2	MIC-In_R
	3	MIC-In_JD#	4	GND
	5	Line-In_L	6	Line-In_R
	7	Line-In_JD#	8	GND
	9	Line-Out_L	10	Line-Out_R
	11	Line-Out_JD#	12	GND
SMD 12P 2R 180D Pitch:2.54mm, Gold Flash, NY9T, Green Insulator [PINREX 212-92-06GBE1]				

Table 21 CN16 Left Channel 3W Audio AMP Output Wafer


	Pin	Signal Name
	1	Speaker+
	2	Speaker-
DIP 2P 180° Pitch=2.0mm WAFER [YIMTEX 503PW1*02STR & 503PW1*02ST-1R]		

Table 22 CN19 Right Channel 3W Audio AMP Output Wafer


	Pin	Signal Name
	1	Speaker+
	2	Speaker-
DIP 2P 180° Pitch=2.0mm WAFER [YIMTEX 503PW1*02STR & 503PW1*02ST-1R]		

Table 23 CN20 COM1 RS-232/422/485 Port Wafer

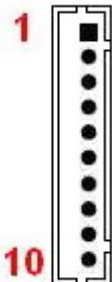
	Pin	RS-232	RS-422	Half Duplex RS-485	Full Duplex RS-485
	1	DCD	TX-	DATA-	TX-
	2	DSR	N/A	N/A	N/A
	3	RXD	TX+	DATA+	TX+
	4	RTS	N/A	N/A	N/A
	5	TXD	RX+	N/A	RX+
	6	CTS	N/A	N/A	N/A
	7	DTR	RX-	N/A	RX-
	8	RI	N/A	N/A	N/A
	9	GND	GND	GND	GND
	10	+5V	+5V	+5V	+5V
SMD 10P 1R 180D MALE P=1.25mm, Tin Plated, NY46, White Insulator [Pinrex 712-73-10TWB0]					

Table 24 CN21 COM2 RS-232/422/485 Port Wafer

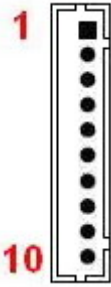
	Pin	RS-232	RS-422	Half Duplex RS-485	Full Duplex RS-485
	1	DCD	TX-	DATA-	TX-
	2	DSR	N/A	N/A	N/A
	3	RXD	TX+	DATA+	TX+
	4	RTS	N/A	N/A	N/A
	5	TXD	RX+	N/A	RX+
	6	CTS	N/A	N/A	N/A
	7	DTR	RX-	N/A	RX-
	8	RI	N/A	N/A	N/A
	9	GND	GND	GND	GND
	10	+5V	+5V	+5V	+5V
SMD 10P 1R 180D MALE P=1.25mm, Tin Plated, NY46, White Insulator [Pinrex 712-73-10TWB0]					

Table 25 CN22~CN25 COM3~6 RS-232 Port Wafer

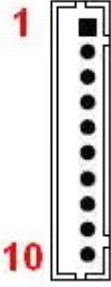
	Pin	Signal Name
	1	DCD
	2	DSR
	3	RXD
	4	RTS
	5	TXD
	6	CTS
	7	DTR
	8	RI
	9	GND
	10	+5V
SMD 10P 1R 180D MALE P=1.25mm, Tin Plated, NY46, White Insulator [Pinrex 712-73-10TWB0]		

Table 26 CN27 MPCIE Activity LED Pin Header


	Pin	Description
	1	LED+
	2	LED-
DIP 2P 1R MALE STRAIGHT TYPE Pitch:2.54mm [YIMTEX 3321*02SAGR(6T)]		

Table 27 FAN1 DC5V FAN Wafer


	Pin	Signal
	1	SENSE
	2	+5V
	3	GND
SMD 3P 180D P-1.25mm WAFER [Pinrex 712-73-03TWE0]		

Table 28 FP1 Front Panel 1 Pin Header

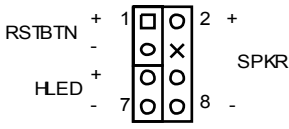
		Pin	Signal	Pin	Signal
		1	Reset Button +	2	Speaker +
		3	Reset Button -	4	NC
		5	HDD LED +	6	Internal Speaker-
		7	HDD LED -	8	Speaker -
		SMD 8P 2R MALE STRAIGHT TYPE Pitch:2.54mm NY 6T [YIMTEX 3362*04SANGR]			
		Note : Internal Buzzer is enabled when Pin6-8 is shorted.			

Table 29 FP2 Front Panel 2 Pin Header

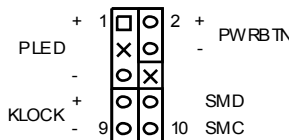
		Pin	Signal	Pin	Signal
		1	Power LED +	2	Power Button +
		3	NC	4	Power Button -
		5	Power LED -	6	SMB_ALERT#
		7	BATLOW#	8	SMBus Data
		9	GND	10	SMBus Clock
		SMD 10P 2R MALE STRAIGHT TYPE Pitch:2.54mm NY 6T[YIMTEX 3362*05SANGR]			

Table 30 MPCIE1 Mini-PCI Express v1.2 Socket (Full Size)

Signal	Pin	Pin	Signal
WAKE#	1	2	+3.3VSB
Reserved	3	4	Ground
Reserved	5	6	+1.5V
CLKREQ#	7	8	UIM_PWR*
Ground	9	10	UIM_DATA*
REFCLK-	11	12	UIM_CLK*
REFCLK+	13	14	UIM_RESET*
Ground	15	16	UIM_VPP*
Reserved	17	18	Ground
Reserved	19	20	W_Disable#
Ground	21	22	PERST#
PERn0	23	24	+3.3VSB
PERp0	25	26	Ground
Ground	27	28	+1.5V
Ground	29	30	SMB_CLK
PETn0	31	32	SMB_DATA
PETp0	33	34	Ground
Ground	35	36	USB_D-
Ground	37	38	USB_D+
+3.3VSB	39	40	Ground
+3.3VSB	41	42	LED_WWAN#
Ground	43	44	LED_WLAN#
Reserved	45	46	LED_WPAN#
Reserved	47	48	+1.5V
Reserved	49	50	Ground
Reserved	51	52	+3.3VSB

MINI PCI-Express Connector, H:5.6mm, Gold Flash, Tape Reel [FOXCONN AS0B221-S56Q-7H]

* : These pins are connected to CN7 SIM Interface directly

Table 31 MSATA1 Serial ATA Port 1 mSATA Socket (Full Size, optional for MPCIE2)

Signal	Pin	Pin	Signal
NC	1	2	+3.3V
NC	3	4	Ground
NC	5	6	NC
N/A	7	8	NC
Ground	9	10	NC
NC	11	12	NC
NC	13	14	NC
Ground	15	16	NC
NC	17	18	Ground
NC	19	20	NC
Ground	21	22	NC
SATA_RX+	23	24	+3.3V
SATA_RX-	25	26	Ground
Ground	27	28	NC
Ground	29	30	NC
SATA_TX-	31	32	NC
SATA_TX+	33	34	Ground
Ground	35	36	NC
Ground	37	38	NC
+3.3V	39	40	Ground
+3.3V	41	42	NC
Ground	43	44	NC
NC	45	46	NC
NC	47	48	NC
NC	49	50	Ground
NC	51	52	+3.3V

MINI PCI-Express Connector, H:9.9mm, 10u Gold Plating, Tape Reel
[FOXCONN AS0B226-S99Q-7H]

Table 32 SATA1 Serial ATA Port 0 Connector



	Pin	Signal Name
	1	GND
	2	TX+
	3	TX-
	4	GND
	5	RX-
	6	RX+
	7	GND
[FOXCONN LD1807V-S52U]		

Table 33 SATA2 Serial ATA Port 1 Connector (default unmounted)

	Pin	Signal Name
	1	GND
	2	TX+
	3	TX-
	4	GND
	5	RX-
	6	RX+
	7	GND

Rear Panel Pin Assignments



Figure 5 Rear Panel IO

Table 34 Rear Panel Connector List

Label	Function
CN13	GbE LAN1 RJ-45 Connector
CN14	GbE LAN2 RJ-45 Connector
CN8	USB3.0 Port 1,2 Type-A Connector
CN9	USB3.0 Port 3,4 Type-A Connector
CN17	DP Connector
CN18	HDMI Connector

Table 35 CN13 GbE LAN1 RJ-45 Connector

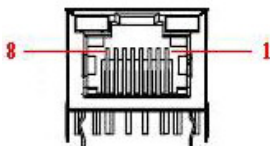
	Pin	Signal Name	Pin	Signal Name
	1	TX1+	5	TX3-
	2	TX1-	6	TX2-
	3	TX2+	7	TX4+
	4	TX3+	8	TX4-
RJ45+TFM+LED 10/100/1000 14P DIP 90° [UDE RT7-174AAM1A(XA)]				

Table 36 CN14 GbE LAN2 RJ-45 Connector

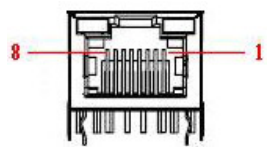


	Pin	Signal Name	Pin	Signal Name
	1	TX1+	5	TX3-
	2	TX1-	6	TX2-
	3	TX2+	7	TX4+
	4	TX3+	8	TX4-
RJ45+TFM+LED 10/100/1000 14P DIP 90° [UDE RT7-174AAM1A(XA)]				

Table 37 CN8 USB3.0 Port-0,1 Type-A Connector

	Pin	Signal Name	Pin	Signal Name
	1	+USBA_VCC	10	+USBB_VCC
	2	USBA_D-	11	USBB_D-
	3	USBA_D-	12	USBB_D-
	4	GND	13	GND
	5	USBA_RX-	14	USBB_RX-
	6	USBA_RX+	15	USBB_RX+
	7	GND	16	GND
	8	USBA_TX-	17	USBB_TX-
	9	USBA_TX+	18	USBB_TX+

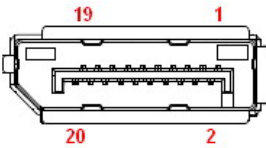
USB3.0x2, Double USB3.0 Type A Receptade, 30u" Pd/Ni Plated + Gold flash, Blue, Tray [FOXCONN UEA1112C-8HS6-4F]
 * : The power source of +USBVCC can be selected by JP6.

Table 38 CN9 USB3.0 Port-2,3 Type-A Connector

	Pin	Signal Name	Pin	Signal Name
	1	+USBA_VCC	10	+USBB_VCC
	2	USBA_D-	11	USBB_D-
	3	USBA_D-	12	USBB_D-
	4	GND	13	GND
	5	USBA_RX-	14	USBB_RX-
	6	USBA_RX+	15	USBB_RX+
	7	GND	16	GND
	8	USBA_TX-	17	USBB_TX-
	9	USBA_TX+	18	USBB_TX+

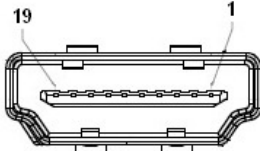
USB3.0x2, Double USB3.0 Type A Receptade, 30u" Pd/Ni Plated + Gold flash, Blue, Tray [FOXCONN UEA1112C-8HS6-4F]
 * : The power source of +USBVCC can be selected by JP6.

Table 39 CN17 DisplayPort Connector

	Pin	Signal Name	Pin	Signal Name
	1	TX0+	11	GND
	2	GND	12	TX3-
	3	TX0-	13	GND
	4	TX1+	14	GND
	5	GND	15	AUX+
	6	TX1-	16	GND
	7	TX2+	17	AUX-
	8	GND	18	HPD
	9	TX2-	19	GND
	10	TX3+	20	PWR

DisplayPort Receptade (Female) SMT type, 20-pin, Gold 30", 90°, Tray [WIN WIN WDPE-20F3L1BU3]

Table 40 CN18 HDMI Connector

	Pin	Signal
	1	TMDS Data2+
	2	Ground
	3	TMDS Data2-
	4	TMDS Data1+
	5	Ground
	6	TMDS Data1-
	7	TMDS Data0+
	8	Ground
	9	TMDS Data0-
	10	TMDS Clock+
	11	Ground
	12	TMDS Clock-
	13	Reserved
	14	Reserved
	15	DDC_CLK
	16	DDC_DATA
	17	Ground
	18	+5 V Power
	19	Hot Plug Detect
	HDMI Receptacle with Flange, selective gold / matte tin 15u", Black, HDMI Certification [ZI HUI 282-1921Q30243]	

Chapter 3

System Installation

■ Memory Module Installation

Carefully follow the steps below in order to install the DIMMs:

1. To avoid generating static electricity and damaging the SO-DIMM, ground yourself by touching a grounded metal surface or use a ground strap before you touch the SO-DIMM.
2. Do not touch the connectors of the SO-DIMM. Dirt or other residue may cause a malfunction.
3. Hold the SO-DIMM with its notch aligned with the memory socket of the board and insert it at a 30-degree angle into the socket.

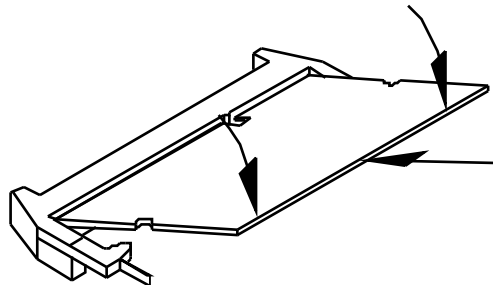


Figure 6 Align the SO-DIMM Memory Module with the onboard socket

4. Fully insert the module into the socket until a “click” is heard.
5. Press down on the SO-DIMM so that the tabs of the socket lock on both sides of the module

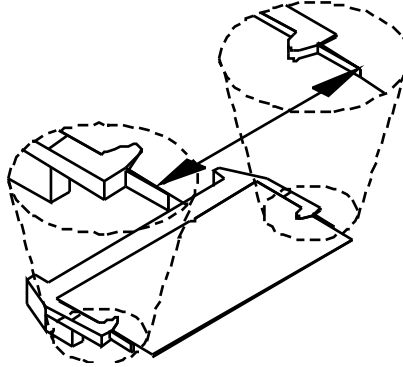


Figure 7 Press down on the SO-DIMM Memory Module to lock it in place

Removing a DIMM:

To remove the SO-DIMM, use your fingers or a small screwdriver to carefully push away the tabs that secure either side of the SO-DIMM. Lift it out of the socket. Make sure you store the SO-DIMM in an anti-static bag. The socket must be populated with memory modules of the same size and manufacturer.

Chapter 4

AMI BIOS Setup

■ Overview

This chapter provides a description of the AMI BIOS. The BIOS setup menus and available selections may vary from those of your product. For specific information on the BIOS for your product, please contact Quanmax.



NOTE: The BIOS menus and selections for your product may vary from those in this chapter. For the BIOS manual specific to your product, please contact Quanmax

AMI's ROM BIOS provides a built-in Setup program, which allows the user to modify the basic system configuration and hardware parameters. The modified data will be stored in a battery-backed CMOS, so that data will be retained even when the power is turned off. In general, the information saved in the CMOS RAM will not need to be changed unless there is a configuration change in the system, such as a hard drive replacement or when a device is added.

It is possible for the CMOS battery to fail, which will cause data loss in the CMOS only. If this happens you will need to reconfigure your BIOS settings.

■ Main Menu

The BIOS Setup is accessed by pressing the DEL key after the Power-On Self-Test (POST) memory test begins and before the operating system boot begins. Once you enter the BIOS Setup Utility, the Main Menu will appear on the screen. The Main Menu provides System Overview information and allows you to set the System Time and Date. Use the “<” and “>” cursor keys to navigate between menu screens.

Table 41 ECX-BT00 BIOS Main Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Product Information					
Product Name		ECX-BW00			
BIOS Version		R1.00 (x64)			
BIOS Build Date		04/21/2016			
TEX FW Version		02.00.04.3098			
CPU Information					
Intel® Celeron® CPU N 3160 @ 1.60GHz					
Microcode Revision		408			
Processor Cores		4			
Memory Information					
Total Size		4096 MB (DDR3L)			
Frequency		1600 MHz			
System date		[Thu 05/05/2016]			
System time		[16:31:45]			
Access Level		Administrator			
→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit					
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

■ Advanced Menu

Table 42 Advanced Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Onboard LAN1 Controller		[Enabled]		→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Onboard LAN1 Boot		[Disabled]			
Onboard LAN2 Controller		[Enabled]			
Onboard LAN2 Boot		[Disabled]			
Audio Controller		[Enabled]			
> Display Configuration					
> Super IO Configuration					
> CPU Chipset Configuration					
> SATA Configuration					
> USB Configuration					
> DIO Configuration					
> H/W Monitor					
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Onboard LAN 1 Controller

Options: Disabled, Enabled

Onboard LAN 1 Boot

Options: Disabled, Enabled

Onboard LAN 2 Controller

Options: Disabled, Enabled

Onboard LAN 2 Boot

Options: Disabled, Enabled

Audio Controller

Options: Disabled, Enabled

Table 43 Advanced Menu – Display Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Display Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Primary Display		[IGD]			
UMA Frame Buffer Size		[256MB]			
DVMT Pre-Allocated		[64M]			
DVMT Total Gfx Mem		[256MB]			
Primary IGFX Boot Display		[VBIOS Default]			
PWM Backlight Control		[By External]			
LVDS Backlight Control - PWM		127			
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Primary Display

Options: IGD, PCIe, Auto

UMA Frame Buffer Size

Options: 128MB, 256MB, 512MB

DVMT Pre-Allocated

Options: 32M, 64M, 96M, 128M, 160M, 192M, 224M, 256M, 288M, 320M, 352M, 384M, 416M, 448M, 480M, 512M

DVMT Total Gfx Mem

Options: 128M, 256M, Max

Primary IGFX Boot Display

Options: VBIOS Default, DP, HDMI, LVDS

PWM Backlight Control

Options: By External, By Internal

Table 44 Advanced Menu – Super IO Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Super IO Chip Parameters. >Serial Port 1 Configuration >Serial Port 2 Configuration >Serial Port 3 Configuration >Serial Port 4 Configuration >Serial Port 5 Configuration >Serial Port 6 Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Table 45 Advanced Menu – Super IO Configuration – Serial Port 1 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 1 Configuration				→←: Select Screen	
Serial Port				↑↓: Select Item	
Device Settings				Enter: Select	
Change Settings				+/-: Change Opt.	
Serial Port 1 Type				F1: General Help	
				F2: Previous Values	
				F3: Optimized Defaults	
				F4: Save & Exit	
				ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=3F8h; IRQ=4;

IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

Serial Port 1 Type

Options: RS232, RS422, RS485

RS485 Duplex Mode

Options: Half Duplex, Full Duplex

RS485 Auto Flow Control

Options: Disabled, Enabled

Table 46 Advanced Menu – Super IO Configuration – Serial Port 2 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 2 Configuration				→←: Select Screen	
				↑↓: Select Item	
Serial Port		[Enabled]		Enter: Select	
Device Settings		IO=2F8h ; IRQ=3;		+/-: Change Opt.	
				F1: General Help	
Change Settings		[Auto]		F2: Previous Values	
Serial Port 2 Type		[RS232]		F3: Optimized Defaults	
				F4: Save & Exit	
				ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=2F8h; IRQ=3;

IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12

Serial Port 2 Type

Options: RS232, RS422, RS485

RS485 Duplex Mode

Options: Half Duplex, Full Duplex

RS485 Auto Flow Control

Options: Disabled, Enabled

Table 47 Advanced Menu – Super IO Configuration – Serial Port 3 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 3 Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Serial Port	[Enabled]				
Device Settings	IO=3E8h ; IRQ=7;				
Change Settings	[Auto]				
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=3E8h; IRQ=7;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

Table 48 Advanced Menu – Super IO Configuration – Serial Port 4 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 4 Configuration				→←: Select Screen	
Serial Port				↑↓: Select Item	
Device Settings				Enter: Select	
Change Settings				+/-: Change Opt.	
[Enabled]				F1: General Help	
IO=2E8h ; IRQ=7;				F2: Previous Values	
[Auto]				F3: Optimized Defaults	
				F4: Save & Exit	
				ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=2E8h; IRQ=7;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

Table 49 Advanced Menu – Super IO Configuration – Serial Port 5 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 5 Configuration				→←: Select Screen	
				↑↓: Select Item	
Serial Port		[Enabled]		Enter: Select	
Device Settings		IO=2F0h ; IRQ=7;		+/-: Change Opt.	
				F1: General Help	
Change Settings		[Auto]		F2: Previous Values	
				F3: Optimized Defaults	
				F4: Save & Exit	
				ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=2F0h; IRQ=7;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

Table 50 Advanced Menu – Super IO Configuration – Serial Port 6 Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Serial Port 6 Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Serial Port	[Enabled]				
Device Settings	IO=2F0h ; IRQ=7;				
Change Settings	[Auto]				
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Serial Port

Options: Disabled, Enabled

Change Settings

Options: Auto,

IO=2E0h; IRQ=7;

IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12;

Table 51 Advanced Menu – CPU Chipset Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
CPU Chipset Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
EIST		[Enabled]			
CPU C state Report		[Enabled]			
Max CPU C-state		[C7]			
SOix		[Disabled]			
Limit CPUID Maximum		[Enabled]			
Intel Virtualization Technology		[Disabled]			
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

EIST

Options: Disabled, Enabled

CPU C state Report

Options: Disabled, Enabled

Max CPU C-state

Options: C7, C6, C1

SOix

Options: Disabled, Enabled

Limit CPUID Maximum

Options: Disabled, Enabled

Intel® Virtualization Technology

Options: Disabled, Enabled

Table 52 Advanced Menu –SATA Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
SATA Configuration				→←: Select Screen	
SATA Controller		[Enabled]		↑↓: Select Item	
SATA Interface Speed		[Gen3]		Enter: Select	
				+/-: Change Opt.	
Serial ATA Port 1		Empty		F1: General Help	
Port 1		[Enabled]		F2: Previous Values	
mSATA Port 1		Empty		F3: Optimized Defaults	
Port 2		[Enabled]		F4: Save & Exit	
				ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

SATA Controller

Options: Enabled, Disabled

SATA Interface Speed

Options: Gen1, Gen2, Gen3

Port 1

Options: Enabled, Disabled

Port 2

Options: Enabled, Disabled

Table 53 Advanced Menu – USB Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
USB Configuration				→←: Select Screen	
USB Devices:				↑↓: Select Item	
1 Drive, 1 Hub				Enter: Select	
LegacyUSB Support				+/-: Change Opt.	
[Enabled]				F1: General Help	
XHCI Legacy Support				F2: Previous Values	
[Enabled]				F3: Optimized Defaults	
XHCI hand-off				F4: Save & Exit	
[Disabled]				ESC: Exit	
USB Mass Storage Driver Support					
[Enabled]					
Mass Storage Devices:					
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Legacy USB Support

Options: Enabled, Disabled, Auto

XHCI Legacy Support

Options: Enabled, Disabled

XHCI hand-off

Options: Enabled, Disabled

USB Mass Storage Driver Support

Options: Disabled, Enabled

Table 54 Advanced Menu – DIO Configuration

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
DIO Configuration				<div>→←: Select Screen</div> <div>↑↓: Select Item</div> <div>Enter: Select</div> <div>+/-: Change Opt.</div> <div>F1: General Help</div> <div>F2: Previous Values</div> <div>F3: Optimized Defaults</div> <div>F4: Save & Exit</div> <div>ESC: Exit</div>	
User Configuration		[Disabled]			
DI_1		1			
DI_2		1			
DI_3		1			
DI_4		1			
DO_1		0			
DO_2		0			
DO_3		0			
DO_4		0			
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

User Configuration

Options: Enabled, Disabled

DO_1

Options: Output Low, Output High

DO_2

Options: Output Low, Output High

DO_3

Options: Output Low, Output High

DO_4

Options: Output Low, Output High

Table 55 Advanced Menu – H/W Monitor

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
PC Health Status				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
CPU Warning Temperature		[Disabled]			
> Smart FAN Configuration					
CPU Temperature		: +39 C			
System Temperature		: +38 C			
CPU Fan Speed		: N/A			
+VCORE		: +1.013 V			
+VIN		: +12.268 V			
+5V		: +5.066 V			
+VMEN		: +1.365 V			
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

CPU Warning Temperature

Options: Disabled, 80 C, 85 C, 90 C, 95 C

Smart FAN Configuration**CPU FAN Setting [Manual]**

Options: Manual, Smart

■ Power Menu

Table 56 Power Configuration

BIOS SETUP UTILITY							
Main	Advanced	Power	Security	Boot	Save & Exit		
Power Configuration				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit			
ACPI Sleep State		[S3 (Suspend to RAM)]					
Restore AC Power Loss		[Power Off]					
Power Saving Mode		[Disabled]					
Resume Event Control							
Resume from S3 ByPS/2 Keyboard		[Disabled]					
Resume from S3 ByPS/2 Mouse		[Disabled]					
Resume By LAN Device		[Disabled]					
Resume By PCI-E Device		[Disabled]					
Resume By Ring Device		[Disabled]					
Resume By RTC Alarm		[Disabled]					
>Watchdog Timer Configuration							
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.							

ACPI Sleep State

Options: Suspend Disabled, S3 (Suspend to RAM)

Restore AC Power Loss

Options: Power Off, Power On, Last State

Power Saving Mode

Options: Disabled, EUP Enabled

Resume from S3 By PS/2 Keyboard

Options: Disabled, Enabled

Resume from S3 By PS/2 Mouse

Options: Disabled, Enabled

Resume By LAN Device

Options: Disabled, Enabled

Resume By PCI-E Device

Options: Disabled, Enabled

Resume By Ring Device

Options: Disabled, Enabled

Resume By RTC Alarm

Options: Disabled, Enabled

Watchdog Timer Configuration

■ WDT Function [Disabled]

Options: Disabled, Enabled

■ Security Menu

Table 57 Security Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
<p>Pass word Description</p> <p>If ONLY the Administrator's password is set, then this only limits access to Setup and is only asked for when entering Setup</p> <p>If ONLY the User's password is set, then this is a power on password and must be entered to boot or enter Setup. In Setup the User will have Administrator rights</p> <p>The password length must be in the following range:</p> <p>Minimum Length 3</p> <p>Maximum length 20</p> <p>Administrator Password</p> <p>User Password</p> <p>HDD Security Configuration:</p>				<p>→←: Select Screen</p> <p>↑↓: Select Item</p> <p>Enter: Select</p> <p>+/-: Change Opt.</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4: Save & Exit</p> <p>ESC: Exit</p>	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

■ Boot Menu

Table 58 Boot Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Boot Configuration				→←: Select Screen	
Full Screen LOGO Display		[Disabled]	↑↓: Select Item		
Setup Prompt Timeout		1	Enter: Select		
Bootup NumLock State		[On]	+/-: Change Opt.		
CSM Support		[Enabled]	F1: General Help		
Boot Option Filter		[Legacy Only]	F2: Previous Values		
Boot Option Priorities				F3: Optimized Defaults	
Boot Option #1				F4: Save & Exit	
Boot Option #2				ESC: Exit	
CD/DVD ROM Drive BBS Priorities					
Hard Drive BBS Priority					
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Full Screen LOGO Display

Options: Disabled, Enabled

Bootup Numlock State

Options: On, Off

CSM Support

Options: Enabled, Disabled

Boot Option Filter

Options: UEFI and Legacy, Legacy only, UEFI only

■ Save & Exit Menu

Table 59 Save & Exit Menu

BIOS SETUP UTILITY					
Main	Advanced	Power	Security	Boot	Save & Exit
Save C hanges and Reset Discard Changes and Res et Save Opti ons Save C hanges Discard Changes Restore Defaults				→←: Select Screen ↑↓: Select Item Enter: Select +/-: Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4: Save & Exit ESC: Exit	
Version 2.17.1249. Copyright (C) 2016, American Megatrends, Inc.					

Save Changes and Exit

Exit system setup after saving the changes. Once you are finished making your selections, choose this option from the Exit menu to ensure the values you selected are saved to the CMOS RAM. The CMOS RAM is sustained by an onboard backup battery and stays on even when the PC is turned off. When you select this option, a confirmation window appears. Select [Yes] to save changes and exit.

Discard Changes and Exit

Exit system setup without saving any changes. Select this option only if you do not want to save the changes that you made to the Setup program. If you made changes to fields other than system date, system time, and password, the BIOS asks for a confirmation before exiting.

Discard Changes

Discards changes done so far to any of the setup values. This option allows you to discard the selections you made and restore the previously saved values. After selecting this option, a confirmation appears. Select [Yes] to discard any changes and load the previously saved values.

Load Optimal Defaults

Load Optimal Default values for all the setup values. This option allows you to load optimal default values for each of the parameters on the Setup menus, which will provide the best performance settings for your system. The F9 key can be used for this operation.

Load Failsafe Defaults

Load Optimal Default values for all the setup values. This option allows you to load failsafe default values for each of the parameters on the Setup menus, which will provide the most stable performance settings. The F8 key can be used for this operation.

Chapter 5

Driver Installation

If your ECX-BW00 does not come with an operating system pre-installed, you will need to install an operating system and the necessary drivers to operate it. After you have finished assembling your system and connected the appropriate power source, power it up using the power supply and install the desired operating system. You can download the drivers for the ECX-BW00 from the Quanmax website at www.quanmax.com and install as instructed there. For other operating systems, please contact Quanmax.

NOTE



When the system reboots without connecting the CRT, there might be no image on screen when you insert the CRT/VGA cable. Please pressing **<Ctrl>+<Alt>+<F1>** simultaneously to show the image on screen.

Appendix A

DIO (Digital I/O) Sample Code

```

/*****
//ECX-BW00 DOS DIO sample program
//Please compile with Microsoft(R) Visual C++ Version 1.5 & MASM611
//to utilized the program
//
//Access Method
// 32 bits memory address access
//
//0:Low 1:High
//DI_1: memory address 0xFED8C400 bit0
//DI_2: memory address 0xFED8C418 bit0
//DI_3: memory address 0xFED8C438 bit0
//DI_4: memory address 0xFED8C408 bit0
//
//DO_1: memory address 0xFED8C428 bit1
//DO_2: memory address 0xFED8C420 bit1
//DO_3: memory address 0xFED8C440 bit1
//DO_4: memory address 0xFED8C410 bit1
//
*****/
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

typedef unsigned long    DWORD;

DWORD MEM_BASE_ADDRESS = 0xFED88000;
DWORD addr_offset[8] = {0x4400, //DI_1
                        0x4418, //DI_2
                        0x4438, //DI_3

```

```

        0x4408, //DI_4
        0x4428, //DO_1
        0x4420, //DO_2
        0x4440, //DO_3
        0x4410}; //DO_4

DWORD addr=0;

int main()
{
    DWORD RetVal = 0;
    DWORD gGpioLValue = 0;
    int i=0;

    //Read the DI pin 1~4 value
    into_PT_mode();//into the protect mode
    printf("Read DI_1~4 value\n");
    for (i=0; i<4; i++)
    {
        RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
        gGpioLValue = RetVal & 0x1;
        printf("DI_ %d = %d\n",i+1 ,gGpioLValue > 0);
    }
    into_RL_mode();
    system("pause");

    //Read the DO pin 1~4 value
    into_PT_mode();
    printf("Read DO_1~4 value\n");
    for (i=4; i<8; i++)
    {
        RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
        gGpioLValue = RetVal & 0x2;
        printf("DO_ %d = %d\n",i-3 ,gGpioLValue > 0);
    }
    into_RL_mode();
    system("pause");

    //Write the DO pin 1~4 to High

```

```

into_PT_mode();
printf("Write DO_1~4 value to High\n");
for (i=4; i<8; i++)
{
    RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
    gGpioLValue = RetVal | 0x2;
    write_mem_dword(MEM_BASE_ADDRESS + addr_offset[i], gGpioLValue);
}
printf("Read DO_1~4 value\n");
for (i=4; i<8; i++)
{
    RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
    gGpioLValue = RetVal & 0x2;
    printf("DO_%d = %d\n",i-3 ,gGpioLValue > 0);
}
into_RL_mode();
system("pause");

//Write the DO pin 1~4 to Low
into_PT_mode();
printf("Write DO_1~4 value to Low\n");
for (i=4; i<8; i++)
{
    RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
    gGpioLValue = RetVal & 0xFFFFFFF0;
    write_mem_dword(MEM_BASE_ADDRESS + addr_offset[i], gGpioLValue);
}
printf("Read DO_1~4 value\n");
for (i=4; i<8; i++)
{
    RetVal = read_mem_dword(MEM_BASE_ADDRESS + addr_offset[i]);
    gGpioLValue = RetVal & 0x2;
    printf("DO_%d = %d\n",i-3 ,gGpioLValue > 0);
}
into_RL_mode();

return 0;
}

```

Appendix B

WatchDog Timer Sample Code

```
//*****
//*****
//**
**
//**          (C) Copyright 2013-2015, Quanmax, Inc.          **
//**
**
//**          All Rights Reserved.          **
//**
**
//**          5F, No.455, Ti-Ding Blvd., Sec. 2,          **
//**          Neihu District, Taipei, Taiwan 114          **
//**          **
//**          Phone: +886-2-2799-2789
**
//**
**
//*****
//*****
//=====
=====//
//ECX-BW00 DOS Watchdog sample program          //
//Please compile with Turbo C 3.0 to utilized the program          //
//=====
=====//

#include<stdio.h>

#define SIO_CONFIG_INDEX 0x2e
#define SIO_CONFIG_DATA SIO_CONFIG_INDEX+1

void UnlockSIO()
{
    outp(SIO_CONFIG_INDEX,0x87);
    outp(SIO_CONFIG_INDEX,0x87);
}

void LockSIO()
```

```

{
    outp(SIO_CONFIG_INDEX,0xAA);
}

void SetLDN(int LDN)
{
    outp(SIO_CONFIG_INDEX, 0x07);
    outp(SIO_CONFIG_DATA, LDN);
}

void main()
{
    int value = 0;

    UnlockSIO();
    SetLDN(0x08);

    //Enable WDT
    outp(SIO_CONFIG_INDEX,0x30);
    outp(SIO_CONFIG_DATA,0x01);

    //Set Timer unit(0xF0 bit3(0: 1sec, 1: 60 sec) of watchdog timer by setting
this bit)
    outp(SIO_CONFIG_INDEX,0xF0);
    value=inp(SIO_CONFIG_DATA);
    outp(SIO_CONFIG_DATA,(value & 0xF7)); //set unit sec.

    //Set Timer Value(0xF1 Time of watchdog timer)
    outp(SIO_CONFIG_INDEX,0xF1);
    outp(SIO_CONFIG_DATA,0x14); //set to 20 sec (0x14)

    LockSIO();
}

```