



IPS316-2GC-4POE

DIN-Rail Mounting

6-port 100M/Gigabit Layer 2 Unmanaged Industrial PoE Ethernet Switch

- Support 2 gigabit Combo ports (SFP slot or RJ45) and 4 100M PoE copper ports
- The maximum power consumption of single port PoE is 30W
- PoE could power device over Ethernet, thus decreasing the cable connection of powered devices
- Support dual power supply inputs, input voltage: 48VDC
- Support -40~75°C wide operating temperature range




Introduction

IPS316-2GC-4POE is 6-port 100M/gigabit layer 2 unmanaged industrial PoE Ethernet switch, and the PoE power supply is up to the protocol standard of IEEE 802.3af/at. This product provides 100M PoE copper ports and gigabit Combo ports (SFP slot or RJ45). It also adopts DIN-Rail mounting, which can meet the requirements of different scenes.

The input power supply is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. The DIP switch could implement functions like Flow Control, Port Alarm, RJ45 Forced 10M and VLAN, etc. When power supply or port has link failure, ALARM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Dimension

Unit:mm

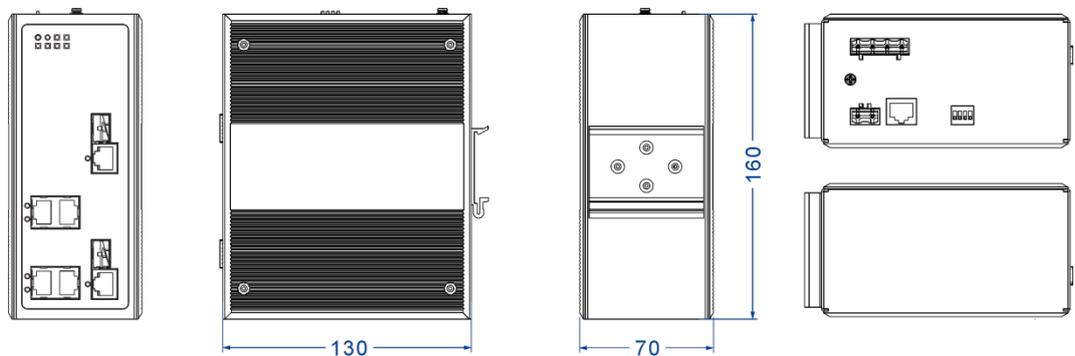

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3z for 1000Base-X IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow Control IEEE 802.3af for PoE IEEE 802.3at for PoE+
---------------------	---

PoE	<p>The maximum power of PoE port: 30W</p> <p>The power supply pin of PoE: V+, V+, V-, V- correspond to Pin 1, 2, 3, 6</p>
Interface	<p>100M PoE copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning</p> <p>Combo port: 10/100/1000Base-T(X) or 1000Base-FX</p> <p>Console port: CLI command line management port (RS-232), RJ45</p> <p>Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity is 1A@24VDC or 0.5A@120VAC</p>
LED Indicator	<p>Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator, PoE Indicator</p>
Switch Property	<p>Transmission mode: store and forward</p> <p>MAC address: 8K</p> <p>Packet buffer size: 1Mbit</p> <p>Backplane bandwidth: 7.6G</p> <p>Switch time delay: <10μs</p>
Power Requirement	<p>48VDC, 4-pin 7.62mm pitch terminal blocks</p> <p>Dual power supply redundancy, reverse polarity protection</p>
Power Consumption	<p>No-load: 7.9W@48VDC</p> <p>Full-load: 113.4@48VDC</p>
Environmental Limit	<p>Operating temperature range: -40~75$^{\circ}$C</p> <p>Storage temperature range: -40~75$^{\circ}$C</p> <p>Relative humidity: 5% ~ 95%(no condensation)</p>
Physical Characteristic	<p>Housing: IP40 protection, metal</p> <p>Installation: DIN-Rail mounting</p> <p>Dimension (W x H x D): 70mm\times160mm\times130mm</p> <p>Weight: 1.07kg</p>
Industrial Standard	<p>IEC 61000-4-2 (ESD), Level 3</p> <ul style="list-style-type: none"> ● Air discharge: \pm8kV ● Contact discharge: \pm6kV <p>EN61000-4-4 (EFT), Level 3</p> <ul style="list-style-type: none"> ● Power supply: \pm2kV ● Ethernet port: \pm2kV ● Relay: \pm2kV

IEC 61000-4-5 (Surge), Level 3

- Power supply: common mode \pm 2kV, differential mode \pm 1kV
- Ethernet port: \pm 2kV
- Relay: common mode \pm 2kV, differential mode \pm 1kV

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Certification	CE, FCC, RoHS
Warranty	5 years



Ordering Information

Available Models	Gigabit Combo (SFP slot or RJ45)	100M POE Copper Port	Power Supply
IPS316-2GC-4POE	2	4	48VDC dual power supply



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.