



QTM-1500/1700/1900

15"/17"/19" Multi-touch
Bezel-Free Flat Panel Monitor



- 15"/17"/19" 10-point PCT multi-touch LCD Display
- 1x HDMI, 1x DVI-D, 1x VGA
- 1x USB2.0 for touch functionality
- IP65 approved front bezel
- Glass hardness of 6H
- Bezel-free flat panel design



Product Overview

The QTM-1500/1700/1900 is a 15" / 17" / 19" multi-touch bezel-free flat panel monitor. It features 10-point PCT multi-touch panel and enables fast / intuitive operation.

Besides, it comes with a variety of display ports, including 1x HDMI, 1x DVI-D and 1x VGA, for various viewing

options, and 1x USB 2.0 for touch functionality.


Equipped with an IP65-rated front bezel and anti-scratch glass surface, the QTM-1500/1700/1900 provides excellent resistance to harsh environments and thus is highly suited to a wide range of industrial applications.

Technical Information

| LCD Display | QTM-1500 | QTM-1700 | QTM-1900 |
|---------------------------------|----------|-----------|-----------|
| Display Size | 15 inch | 17 inch | 19 inch |
| Aspect Ratio | 4:3 | 5:4 | 5:4 |
| Resolution | 1024x768 | 1280x1024 | 1280x1024 |
| Backlight | LED | LED | LED |
| Contrast Ratio (typ.) | 600:1 | 1000:1 | 1000:1 |
| Brightness (cd/m², typ.) | 350 | 350 | 250 |
| Touch Sensor | | | |
| 10-point PCT multi-touch sensor | | | |
| External Display | | | |
| 1x HDMI (on rear) | | | |
| 1x DVI-D (on rear) | | | |
| 1x VGA (on rear) | | | |
| Audio | | | |
| 1x Line-out (on rear) | | | |
| 1x Line-in (on rear) | | | |
| USB | | | |
| 1x USB2.0 (on rear for Touch) | | | |

| | |
|---|--|
| Power | |
| Connector: DC Jack (on rear) | |
| Input Voltage: DC 12V (Optional: DC 24V) | |
| Cooling | |
| Fanless | |
| Environment | |
| Operation Temperature: 0°C ~ 50°C / 32°F ~ 122°F | |
| Storage Temperature: -20°C ~ 70°C / -4°F ~ 158°F | |
| Humidity: 0% ~ 95% | |
| Dimension (WxHxD) | |
| QTM-1500: 381.7 x 305.6 x 68.2 mm / 15.03" x 12.03" x 2.69" | |
| QTM-1700: 413.0 x 334.0 x 73.3 mm / 16.26" x 13.15" x 2.89" | |
| QTM-1900: 447.3 x 372.0 x 70.4 mm / 17.61" x 14.65" x 2.77" | |
| Mounting | |
| VESA Mount, Panel Mount | |
| Certification | |
| CE, FCC Class A | |

QTM-1500/1700/1900 I/Os

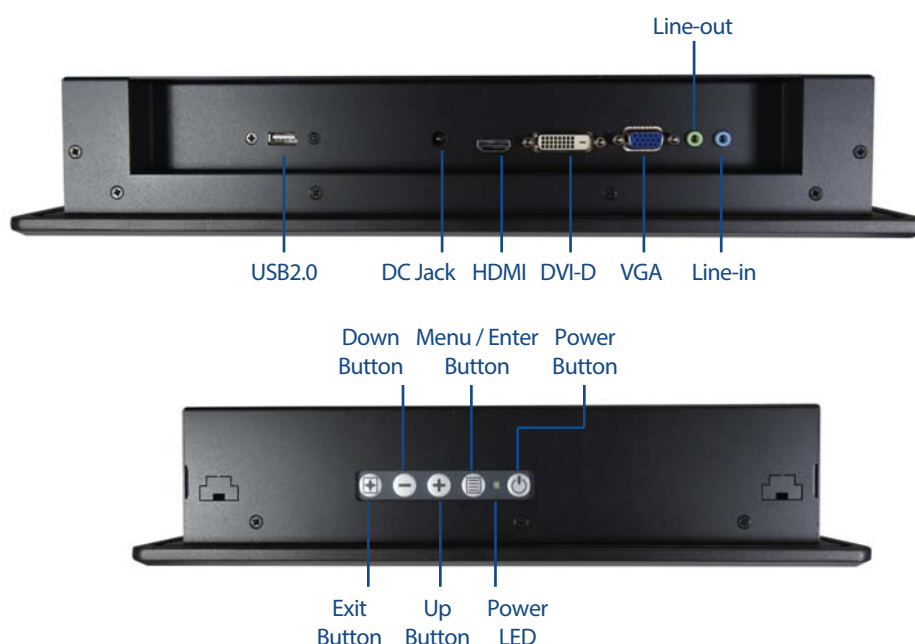



Ordering Information

| Article | Part No. | Description |
|----------|------------------|---|
| QTM-1500 | SQTM150000010T00 | 15" 4:3 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in |
| QTM-1700 | SQTM170000010T00 | 17" 5:4 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in |
| QTM-1900 | SQTM190000010T00 | 19" 5:4 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in |