

NMU

Slide-in Mounting

2 Copper Ports+1 Console 100M Industrial Media Converter Management Card

- Support 2 100M copper ports
- Input voltage: 12VDC
- Support -30 ~ 60°C wide operating temperature range



Introduction


NMU is 100M industrial media converter management card, which could be used matching with RACK2100 rackmount chassis, IMC101M-F and ECU101M-1F. It provides multiple interfaces like copper port and Console etc., and adopts slide-in mounting which is easy and convenient for installation and use.

The product adopts industrial grade design and support IEEE802.3/802.3u/802.3x store-and-forward mode and management standards of WEB, Telnet, SNMP and Console port etc. The copper ports support 10/100M self-adaption.

The hardware adopts fanless, low power consumption and wide temperature and voltage design, which has passed rigorous industrial standard tests, and suits for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, railway transportation, smart city, safe city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Dimension

Unit:mm

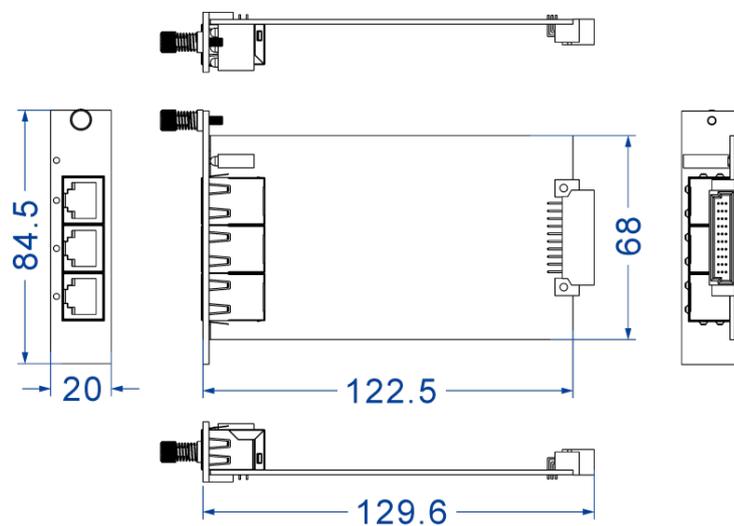

Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow Control
Management	Console/Telnet/WEB Management, SNMP v1/v2c Centralized Management of Equipment
Security	Power Supply Alarm, Port Alarm, E-mail Alarm
Time Management	SNTP
Interface	Copper port: 10/100Base-T(X), RJ45, Automatic Flow Control, Full/Half Duplex Mode, MDI/MDI-X Autotuning Console port: CLI command line management port(RS-232), RJ45
LED Indicator	RUN indicator, Console port indicator, port indicator UP/DOWN
Switch Property	Transmission mode: store and forward Switch time delay: < 10μs
Power Supply	Input voltage: 12VDC
Power Consumption	No-load: 1.00W@12VDC Full-load: 1.51W@12VDC
Operating Environment	Operating temperature range: -30~60°C Storage temperature range: -30~60°C Relative humidity: 5% ~ 95% (no condensation)
Physical Characteristic	Installation: slide-in mounting Weight: 80g Dimension (W x H x D): 84.5mm×20.0mm×122.5mm
Certification	CE, FCC, RoHS
Warranty	5 years

Ordering Information

Available Models	100M Copper Port	Console	Power Supply
NMU	2	1	12VDC



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.