

# Slim Type Full IP66 Panel PC

## FIP-22WHS

21.5" Stainless Full IP66 / IP69K (Intel Broadwell Core i5 platform)



### Specification

#### System:

- CPU : Intel® 5<sup>th</sup> Gen. Broadwell Core i5-5250U 1.6Ghz (Max. up to 2.7Ghz)
- Chipset : SoC integrated
- Memory : DDR3 1366/1600 MHz SO-DIMM, Default 4GB (max. 16GB)
- Storage : 1x SSD, Default 64GB
- Ethernet : Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I218-LM
- BIOS : AMI UEFI Flash

#### Input / Output :

- Serial Ports : 1 x RS232 (IP66 connector)
- USB Ports : 2 x USB (IP66 connector)
- Ethernet : 1 x RJ45 GbE LAN (IP66 connector)
- Power : AC 110~240V, Universal,  $\pm 10\%$  (IP66 connector)

#### Power Specification :

- Power Adapter : N/A
- Power Consumption : 50W (typ.)

#### Panel Specification :

- Size/ Type : 21.5" TFT LCD
- Resolution : 1920 x 1080
- Brightness : 300 (cd/m<sup>2</sup>)
- Contract Ratio : 1000 : 1 (typ.)
- Viewing Angle : -85~85 (H) ; -80~80 (V)
- Max. Colors : 16.7 M (8bits/color)
- Touch : P-cap touch screen or 5-wire resistive touch


#### Environment Tolerance:

- Operating Temperature : -10 deg. C to 55 deg. C
- Operating Humidity : 10% to 95% (Non Condensing)
- IP Level : Full- IP66 / IP69K

#### Order Options :

- OS : Win 7 / Win10/ Linux Supported
- High Brightness : 1000 cd/m<sup>2</sup> (Optional)
- Power Input : 9~36V DC Input (Optional)
- Custom cable : Custom cable length (Optional)
- Custom I/O : By request

### Drawings:

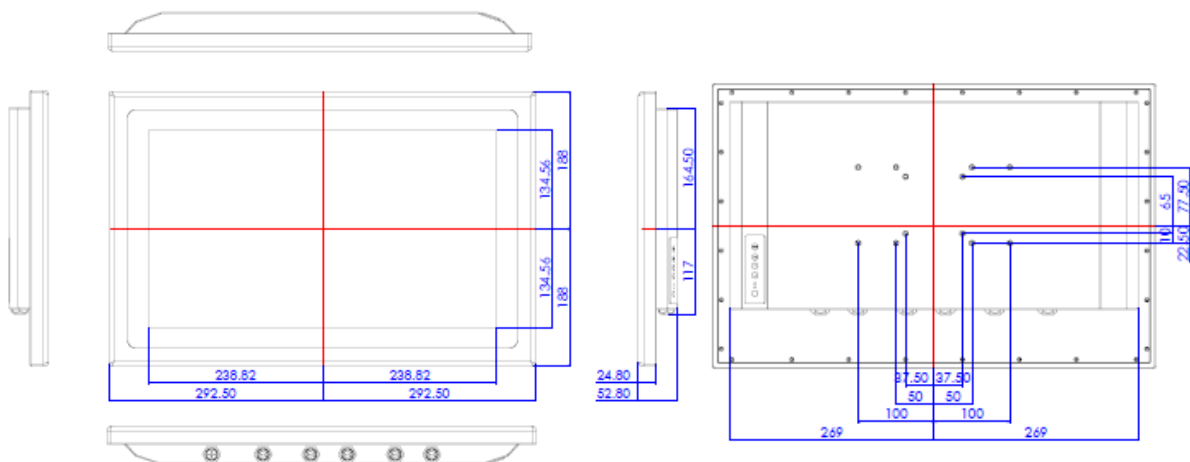

Unit: mm