



IES618 Series

DIN-Rail Mounting

8-port Layer 2 Managed Industrial Ethernet Switch

- Support 4 100M copper ports, 4 fiber or copper ports optional
- Adopt SW-Ring patent technology, support single ring, coupling ring, chain, Dual-homing, automatic recovery time of network failure < 20ms
- Support 12~48VDC dual power supply input with non-polarity and anti-reverse connection protection
- IES618-2F support 100-240VAC power supply
- Support - 40~75°C wide operating temperature range



Industrial Grade



RPS

Introduction

IES618 series are layer 2 managed industrial Ethernet switches. This series include four types of products and provide different combinations of fiber ports and copper ports, which can meet the requirements of different application scenes.

Network management system supports various network protocols and industrial standards, such as STP/RSTP, 802.1Q VLAN, QoS, IGMP Static Multicast, Port Trunking, Port Mirroring, etc. It also possesses complete management functions, including Port Configuration, Port Statistics, Access Control, Network Diagnosis, Rapid Configuration, Online Upgrading and so on. Moreover, it supports CLI, WEB, Telnet, SNMP and other access modes. It can provide users with good experience via friendly design of network management system interface, simple and convenient operation.



DIP switch can instantly restore factory defaults and achieve product upgrading. When the link failure of power supply or port occurs, ALARM indicator will light up and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, rail transit, smart city, safety city, new energy, aerospace, intelligent manufacturing, military project and other industrial fields.

Features and Benefits

- ⊙ SNMPv1/v2c is used for network management of various levels
- ⊙ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⊙ QoS supports real-time traffic classification and priority setting
- ⊙ File management is convenient for rapid configuration and online upgrade of the device
- ⊙ Port statistics can be used for the port real time traffic statistics
- ⊙ User password can conduct user hierarchical management to improve the device administrative security
- ⊙ Relay alarm is convenient for troubleshooting of construction site
- ⊙ Storm suppression can restrain broadcast, unknown multicast and unknown unicast
- ⊙ VLAN can simplify the network planning
- ⊙ Port trunking can increase network bandwidth and the reliability of network connection to achieve optimal bandwidth utilization
- ⊙ Bandwidth management and flow control can reasonably distribute network bandwidth, preventing unpredictable network status
- ⊙ Static multicast can be used for filtering multicast traffic to save the network bandwidth
- ⊙ SW-Ring and STP/RSTP can achieve network redundancy, preventing network storm

Dimension

Unit:mm

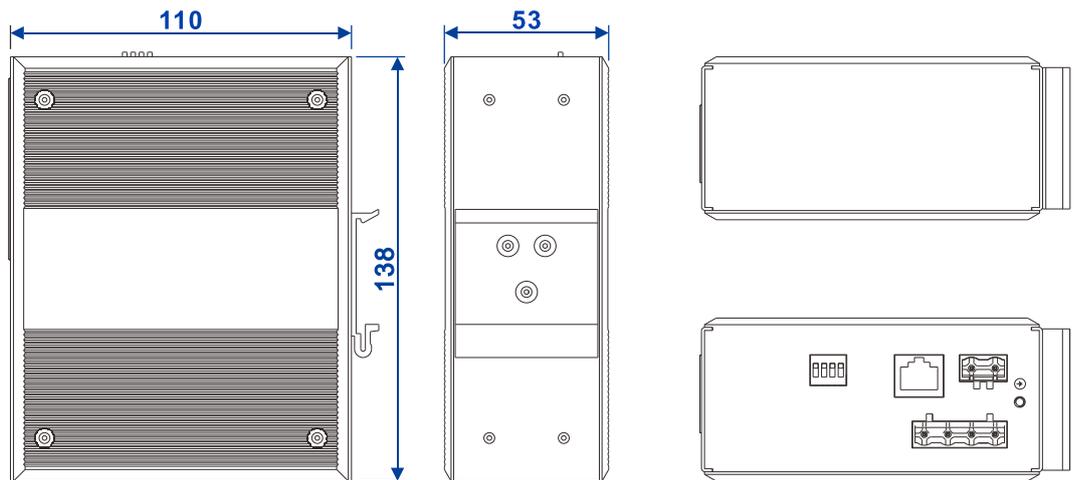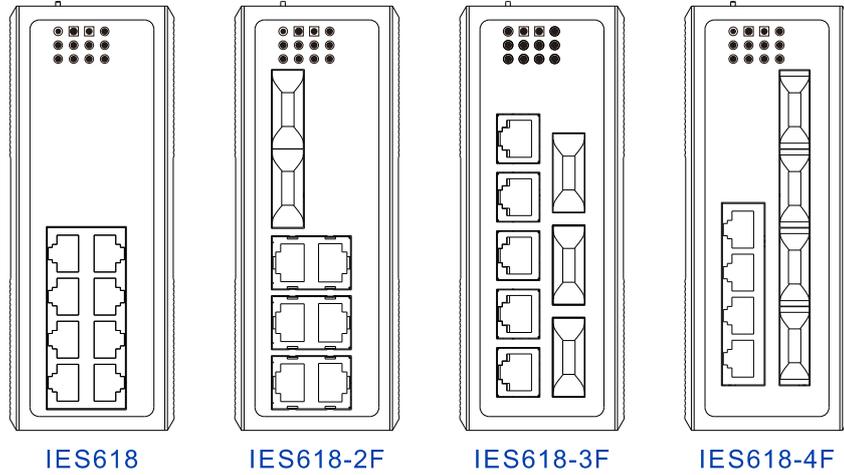

Specification

<p>Standard & Protocol</p>	<p>IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3x for Flow Control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1Q for VLAN IEEE 802.1p for CoS</p>
---------------------------------------	---

Management

Console/Telnet/WEB Management, SNMP v1/v2c Centralized

Management of Equipment, Port Mirroring, QoS, File Management, Port Statistics

Security	Classification of User Permissions, Relay Alarm (Port Alarm and Power Supply Alarm)																		
Switch Function	802.1Q Vlan, Static Port Aggregation, Bandwidth Management, Flow Control																		
Unicast / Multicast	Static Multicast																		
Redundancy Protocol	SW-Ring, STP/RSTP																		
Interface	Copper port: 10/100Base-T(X) RJ45, Automatic Flow Control, Full/half Duplex Mode Self-adaption, MDI/MDI-X Autotuning Fiber port: 100Base-FX Console port: CLI command line management port (RS-232), RJ45 Alarm port: 2-pin 7.62mm pitch terminal blocks, support 1 relay alarm output, current carrying capacity 1A@24VDC or 0.5A@120VAC																		
LED Indicator	Running Indicator, Port Indicator, Power Supply Indicator, Alarm Indicator																		
Switch Property	Transmission mode: store and forward MAC address: 2K Packet buffer size: 1Mbit Backplane bandwidth: 2G Switch time delay: < 15μs																		
Power Requirement	12~48VDC, 4-pin 7.62mm pitch terminal blocks dual power supply redundancy, nonpolarity, reverse polarity protection 100-240VAC single power supply																		
Power Consumption	<table border="1"> <thead> <tr> <th>Model</th> <th>No-load (@24VDC)</th> <th>Full-load (@24VDC)</th> </tr> </thead> <tbody> <tr> <td>IES618</td> <td>1.46W</td> <td>3.48W</td> </tr> <tr> <td>IES618-2F</td> <td>3.05W</td> <td>4.68W</td> </tr> <tr> <td>IES618-3F</td> <td>4.30W</td> <td>5.60W</td> </tr> <tr> <td>IES618-4F</td> <td>5.18W</td> <td>6.52W</td> </tr> <tr> <td>IES618-2F-P220</td> <td>3.3W(@220VAC)</td> <td>4.8W(@220VAC)</td> </tr> </tbody> </table>	Model	No-load (@24VDC)	Full-load (@24VDC)	IES618	1.46W	3.48W	IES618-2F	3.05W	4.68W	IES618-3F	4.30W	5.60W	IES618-4F	5.18W	6.52W	IES618-2F-P220	3.3W(@220VAC)	4.8W(@220VAC)
Model	No-load (@24VDC)	Full-load (@24VDC)																	
IES618	1.46W	3.48W																	
IES618-2F	3.05W	4.68W																	
IES618-3F	4.30W	5.60W																	
IES618-4F	5.18W	6.52W																	
IES618-2F-P220	3.3W(@220VAC)	4.8W(@220VAC)																	
Environmental Limit	Operating temperature: -40~75°C Storage temperature: -40~85°C Relative humidity: 5% ~ 95% (no condensation)																		
Physical Characteristic	Housing: IP40 protection, high-intensity corrugated metal Installation: DIN-Rail mounting																		

	Dimension (W x H x D): 53mm×138mm×110mm
Industrial Standard	IEC61000-4-2 (ESD), Level 4 <ul style="list-style-type: none">● Air discharge: ±15kV● Contact discharge: ±8kV IEC61000-4-5 (Surge), Level 4 <ul style="list-style-type: none">● Power supply: common mode ±4kV, differential mode ±2kV● Ethernet port: ±4kV Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IES 60068-2-6
Certification	CE, FCC, RoHS
Warranty	5 years



Ordering Information

Available Models	100M Fiber Port	100M Copper Port	Power Supply Range
IES618	—	8	12~48VDC dual power supply
IES618-2F	2	6	
IES618-3F	3	5	
IES618-4F	4	4	
IES618-2F-P220	2	6	100-240VAC single power supply



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ [Please scan our QR code for more details](#)

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.