

# Tongue Interlock Safety Switch Type: INCH-1

## FEATURES:

IDEM INCH-1 Compact Safety Interlock switches are designed to provide position interlock detection for small moving guards.

They are designed to fit to the leading edge of sliding, hinged or lift off machine guards.

The rugged Stainless Steel actuator profile is designed to match a cam mechanism to provide a positively operated not easily defeated interlock mechanism.


The compact body only 25mm wide with 18mm fixing centres and rotatable head make them easy to install where space is restricted.

The rotatable heads have dual actuator entry positions to give up to 8 different entry positions.


A Plastic Flexible Actuator is available for tight radius guards.

Contact blocks are replaceable 2NC or 1NC 1NO.

## CONTACT BLOCK OPTIONS:

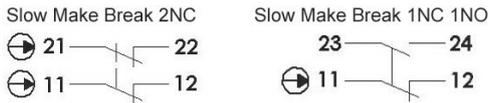

## PRODUCT DIMENSIONS:

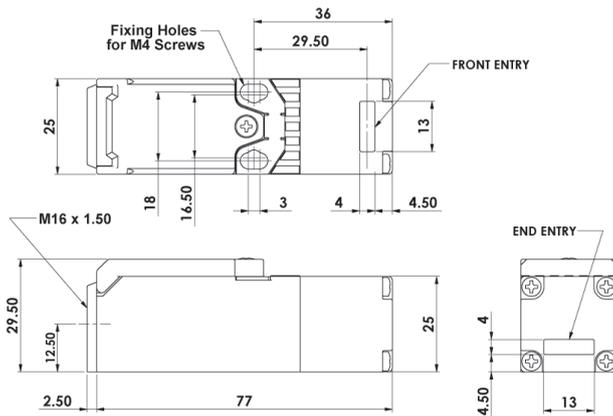

## CONTACT OPERATION:


2NC:	4.0	0mm	1NC 1NO:	4.5	4.0	0mm
11/12	Open		11/12	Open		
21/22	Open		23/24		Open	



### Stainless Steel Guide:

To assist with guard alignment IDEM recommend that you use the Stainless Steel Guide accessory (supplied with two stainless steel self-tapping screws).

SALES NUMBER - INCH 1 STAINLESS STEEL GUIDE 140179



Switch Circuit	Quick Connect (QC) M12 4 Way Male (on Flying Lead 250mm) Pin View from Switch
11/12	1 3
21/22 or 23/24	4 2




## STAINLESS STEEL HEAD



## INCH-1 ACTUATOR OPTIONS:



## ACTUATOR DIMENSIONS:

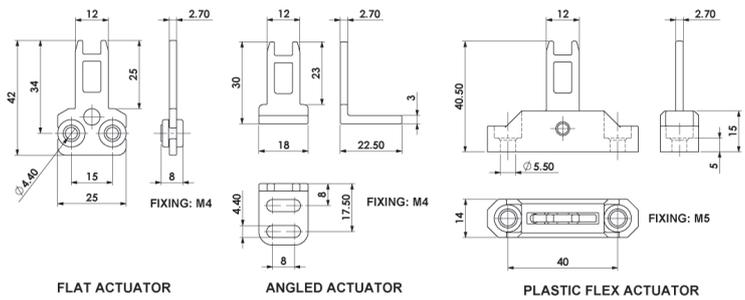

### Safety Classification and Reliability Data:

Mechanical Reliability B10d	2.5 x 10 <sup>6</sup> operations at 100mA load
ISO13849-1 EN62061	Up to PLE depending upon system architecture
Safety Data – Annual Usage	Up to SIL3 depending upon system architecture
Utilization Category	8 cycles per hour/24 hours per day/365 days
Thermal Current	MTTFd 356 years
Rated Insulation/Withstand Voltages	AC15 A300 3A
Travel for Positive Opening	10A
Actuator Entry Minimum Radius	600Vac/2500Vac
Maximum Approach/Withdrawal Speed	6mm
Body Material	150mm Standard 100mm Flexible
Head Material	600mm/s
Enclosure Protection	UL approved glass fibre Polyester
Vibration	Stainless Steel 316
Conduit Entry	IP67
Fixing	IEC 68-2-6 10-55Hz + 1Hz
	Excursion 0.35mm 1 octave/min
	M16
	2 x M4

PRODUCT	CONTACTS	SALES NUMBER	
		M16	QC M12 4 WAY
INCH-1 Switch	2NC	222001	222002
INCH-1 Switch	1NC 1NO	222003	222004
Actuator	Flat	Add F to Sales Number	
Actuator	Angled	Add A to Sales Number	
Actuator	Plastic Flexible	Add PF to Sales Number	

Gold Plated Contacts available for low power circuits (5V 5mA). Add GC to Sales Number e.g. 222001-GC