

**【Summarize】**

The IPS215 series switches is a kind of unmanaged industrial PoE switch, it support 5 Fast Ethernet ports. The 4 Fast Ethernet port (1~4) support Power-over -Ethernet (PoE) function, another Fast Ethernet port is 10/100MBase-T(x) RJ45 or 100M Base-FX optic fiber. The switches are classified as power source equipment (PSE), and when used in this way, the IPS215-4POE switches enable centralization of the power supply, providing up to 30 watts of power per port and reducing the effort needed for installing power. The switches can be used to power IEEE802.3af/at standard devices (PD), eliminating the need for additional wiring.

It support CE, FCC standard, IPS215-4POE adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input (48VDC). The switch support IEEE802.3/IEEE802.3u with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing reliable and economic solution for your industrial Ethernet network.

**【Packing list】**

The industrial PoE switch is shipped with the following items. If any of these items are missing or damaged, please contact your customer service representative for assistance.

- Industrial PoE switch × 1
- User manual × 1
- DIN-Rail mounting kit × 1
- Warranty card × 1


**【Feature】**

- Support 4 10/100Base-TX POE ports and 1 Fast Ethernet port
- Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at, store and forward
- Support IEEE802.3af standard, full-port (PoE) full 15.4W power supply


- Support IEEE802.3at standard, single-port maximum 30W power supply.
- 4 Fast Ethernet port (1~4) support POE function
- Ethernet port support 10/100M self-adaption
- DC48V power input, reverse connection protection
- IP40 protect grade, high strength iron shell, DIN Rail installation
- Industrial grade 4 design

**【Panel layout】**


**Top and bottom panel view**

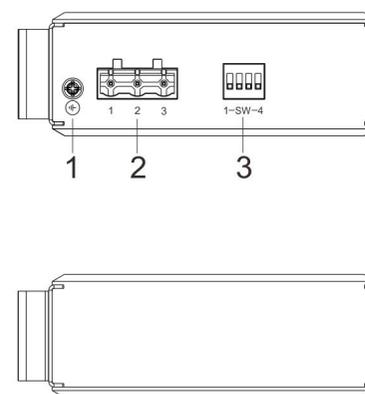

**Rear panel view**

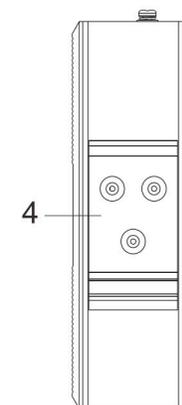


**Front view**

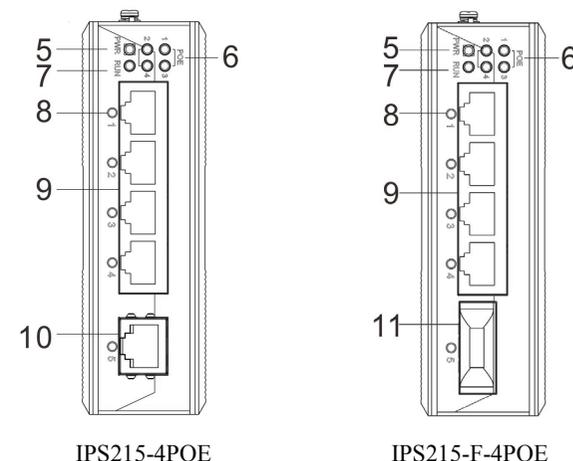

**IPS215 Series**

**Industrial PoE Switch User Manual**

1. Ground screw
2. Power input terminal block (3 bits)
3. DIP switches
4. DIN-Rail mounting kit
5. Power indicator
6. PoE state indicator
7. System running indicator
8. Link/ACT indicator
9. 10/100M Base-T(x) PoE port
10. 10/100M Base-T(x) port
11. 100M Base-FX optic fiber port

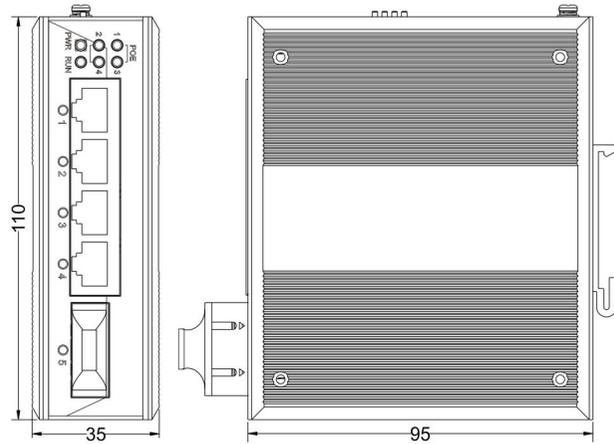

**【DIP Switch】**




Top panel provided 4 bits DIP switch to do function configure (ON to enable effective). 1 is RJ45 port support pause frame flow control and the optic fiber port support back press flow control. 2 is force mode (RJ45 10M), but optic fiber port speed unchanged. 3 is VLAN function that port 5 with port 1-4 can communication, but between ports 1 to port 4 cannot communication. 4 is keeping for future function. Please power off and power on when you change the status of DIP switch.


**【Communication connector】**

**10/100BaseT(X) Ethernet port**

The pinout define of RJ45 port display as below, connect by UTP or STP. The connect distance is no more than 100m. 100Mbps is used 120Ω of UTP 5, 10Mbps is used 120Ω of UTP 3,4,5.

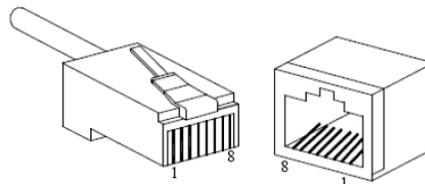


RJ45 port support automatic MDI/MDI-X operation. can connect the PC, Server, Converter and HUB .Pin 1,2,3,6 Corresponding connection in MDI. 1→3, 2→6, 3→1, 6→2 are used as cross wiring in the MDI-X port of Converter and HUB. 10Base-T/100Base-TX are used in MDI/MDI-X, the define of Pin in the table as below.




NO.	MDI signal	MDI-X signal
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4, 5, 7, 8	—	—

Note: “TX±” Transmit Data±, “RX±” Receive Data±, “—” Not use.

**10/100Base-T(X) MDI (straight-through cable)**

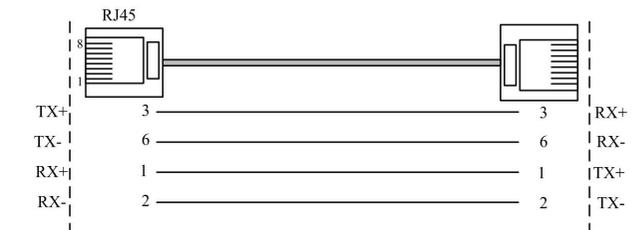


**10/100Base-T(X) MDI-X (Cross over cable)**

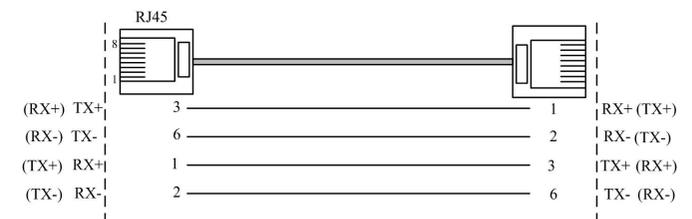

MDI/MDI-X auto connection makes switch easy to use for customers without considering the type of network cable.

**100Base-FX Fiber port**

**【Power supply input】**




The product top panel provided 3 bit power supply input terminal block, support DC input. Voltage input (1, 3) range is 45~55VDC. The power supports reverse polarity protection.

**【Dimension】**

The series of products are the same size, and the type of the Ethernet interface is different. Unit (mm)

IPS215-4POE

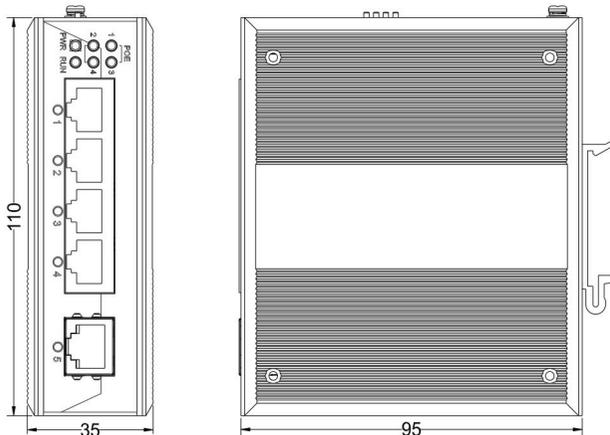


IPS215-F-4POE

100Base-FX full-duplex SM or MM port, SC/ST/FC type .The fiber port must be used in pair, TX (transmit) port connect remote switch's RX(receive) port; RX(receive) port connect remote switch's TX(transmit) port.

The optical fiber connection supports the line to instruct enhance the reliability of network effectively.

**Suppose:** If you make your own cable, we suggest labeling the two sides of the same line with the same letter (A-to-A and B-to-B, shown as below, or A1-to-A2 and B1-to-B2).

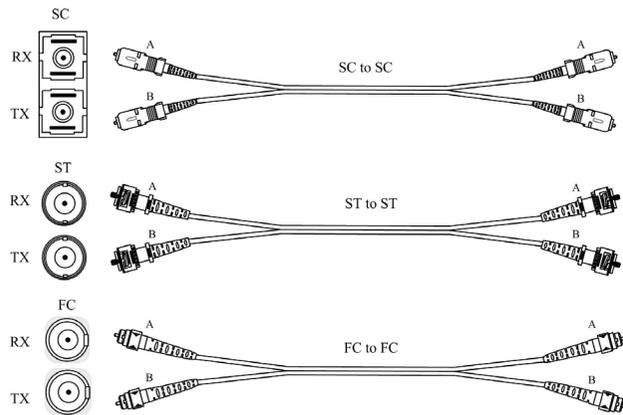

### 【LED Indicator】

LED indicator light on the front panel of product, the function of each LED is described in the table as below.

System indication LED		
LED	State	Description
PWR	ON	Power is being supplied to power input PWR input
	OFF	Power is <b>not</b> being supplied to power input PWR input
RUN	ON/OFF	System is not running well
	Blinking	System is running well
Link/ACT (1~5)	ON	Port connection is active
	OFF	Port connection is not active
	Blinking	Data transmitted

POE (1~4)	ON	The PoE device is connected by IEEE802.3af/at standard
	OFF	No PoE power output or no PoE connected PoE devices

### 【Installation】


Before installation, confirm that the work environment meet the installation require, including the power needs and abundant space. Whether it is close to the connection equipment and other equipments are prepared or not.

1. Avoid in the sunshine, keep away from the heat fountainhead or the area where in intense EMI.
2. Examine the cables and plugs that installation requirements.
3. Examine whether the cables be seemly or not (less than 100m) according to reasonable scheme.
4. Power: 45~55VDC power input
5. Environment: working temperature: -40~75℃  
Storage Temperature: -40~85℃  
Relative humidity 5%~95%

### DIN Rail Installation

In order to use in industrial environments expediently, the product adopt 35mm DIN-Rail installation, the installation steps as below:

1. Examine the DIN-Rail attachment
2. Examine DIN Rail whether be firm and the position is suitability or not.
3. Insert the top of the DIN-Rail into the slot just below the stiff metal spring.
4. The DIN-Rail attachment unit will snap into place as shown below.

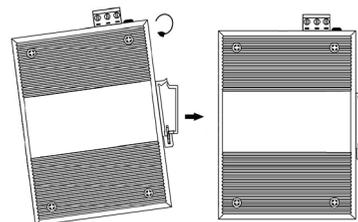

### Wiring Requirements

Cable laying need to meet the following requirements,

1. It is needed to check whether the type, quantity and specification of cable match the requirement before cable laying;
2. It is needed to check the cable is damaged or not, factory records and quality assurance booklet before cable laying;
3. The required cable specification, quantity, direction and laying position need to match construction requirements, and cable length depends on actual position;
4. All the cable cannot have break-down and terminal in the middle;
5. Cables should be straight in the hallways and turning;
6. Cable should be straight in the groove, and cannot beyond the groove in case of holding back the inlet and outlet holes. Cables should be banded and fixed when they are out of the groove;
7. User cable should be separated from the power lines. Cables, power lines and grounding lines cannot be overlapped and mixed when they are in the same groove road. When cable is too long, it cannot hold down other cable, but structure in the middle of alignment rack;
8. Pigtail cannot be tied and swerved as less as possible. Swerving radius cannot be too small (small swerving causes terrible loss of link). Its banding should be moderate, not too tight, and should be separated from other cables;
9. It should have corresponding simple signal at both sides of the cable for maintaining.

### 【Specification】

#### Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at

#### Exchange attribute

100M forward speed: 148810pps

Transmit mode: store and forward

MAC address table: 2K

Bandwidth: 2.0G

#### **Interface**

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm

POE Pin-out: 1/2(+), 3/6(-)

#### **Transfer distance**

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Km

Single-mode: 1310nm, 20/40/60Km  
1550nm, 80/100/120Km

#### **LED indicator**

Interface Link/Act indicator: Link (1~5)

Power supply indicator: PWR

Run indicator: Run

PoE indicator: POE (1~4)

#### **Power supply**

Input Voltage: 48VDC (45~55VDC)

Type of input: 3 bits terminal block

➤ IPS215-4POE

Un-load consumption: 2.69W@48VDC

Full-load consumption: 74.06W@48VDC

➤ IPS215-F-4POE

Un-load consumption: 2.26W@48VDC

Full-load consumption: 73.96W@48VDC

Single PoE port maximum consumption: 30W@48VDC

The power supports reverse polarity protection

#### **Working environment**

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95% (no condensation)

#### **Mechanical Structure**

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail mounting

Weight: 370g

Size (W×H×D): 35mm×110mm×95mm

#### **Industry Standard**

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 2 (IPS215-4POE)

EN61000-4-5 (Surge), Level 3 (IPS215-F-4POE)

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

#### **Certification**

CE, FCC, RoHS, UL508 (Pending)

**Warranty:** 5 years