

## IPMC101-1F-POE

1-port 10/100M Base-T (x) PoE + 1-port 100Base-FX

Industrial PoE Media Converter

### Features

- Support 1 10/100Base-T(X) port and 1 100Base-FX fiber port
- Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at, store and forward
- Compatible with both IEEE802.3at(30W) and IEEE802.3af(15.4W)
- Ethernet port support 10/100M self-adaption and PoE function
- DC48V power input, reverse connection protection
- IP30 protect grade, high strength iron shell, DIN Rail installation
- Industrial grade 4 design, -40 to 75°C working temperature.



### Introduction

The IPMC101-1F-POE is a kind of industrial PoE media converter, it support 1 10Base-T/100Base-TX port and 1 100Base-FX Fiber port. These converters are classified as power source equipment (PSE), and when used in this way provide up to 30 watts to IEEE802.3at compliant powered devices (PDs), eliminating the need for additional wiring.

It support CE, FCC standard, adopt industry standard design, IP30 protection, rugged high-strength metal case, power supply input (48VDC), -40 to 75°C working temperature. The converters support IEEE802.3 / IEEE802.3u / IEEE802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing a complete solution for your industrial Ethernet network.

### Specification

#### Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af, IEEE802.3af

Flow control: IEEE802.3x flow control, back press flow control

#### Exchange attribute

100M forward speed: 148810pps

Transmit mode: store and forward

#### Interface

RJ45 port: 10Base-T/100Base-TX Self-adaption, Half/full duplex and MDI/MDI-X auto detect

100M fiber port: 100Base-FX, SC/FC/ST, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm

POE Pin-out: 1/2(+), 3/6(-)

#### Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Km

Single-mode: 1310nm, 20/40/60Km  
1550nm, 80/100/120Km

#### LED indicator

Run indicator: Run

Interface indicator: Link (1~2)

Power supply indicator: PWR

LFP Alarm indicator: LFP

PoE indicator: POE

#### Power supply

Input Voltage: 48VDC (44~55VDC)

Type of input: 3 bits terminal block

No-load consumption: 1.63W@48VDC

Full-load consumption (PD): 18.96W@48VDC

#### Working environment

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95 % (no condensation)

#### Mechanical Structure

Shell: IP30 protect grade, metal shell

Installation: DIN-Rail or Wall mounts

Weight: 370g

Size (W×H×D): 36mm×110mm×97mm

#### Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 2  
EN61000-4-4 (EFT), Level 2  
EN61000-4-5 (Surge), Level 2  
Shock: IEC 60068-2-27  
Free fall: IEC 60068-2-32


Vibration: IEC 60068-2-6

**Certification**

CE, FCC, RoHS, UL508 (Pending)

**Warranty: 5 years**

**Dimension (Unit: mm)**

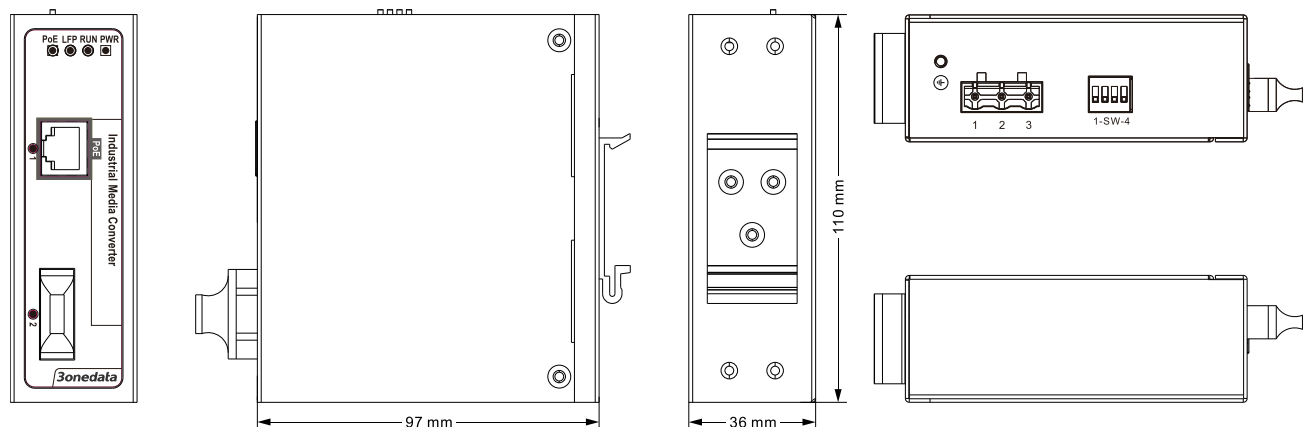

**Packing List**

1. Industrial PoE media Converter (plus terminal block) ×1
2. User manual × 1
3. Certificate of quality × 1
4. Warranty card × 1
5. DIN-Rail mounting kit × 1