

# 215-M28

The entire panel features a 3mm ultra-thin bezel designed for embedded installation, with an aluminum alloy structure and a fanless, fully enclosed design. Equipped with a self-developed industrial display driver board, the device offers excellent anti-interference and heat dissipation performance, making it resistant to harsh conditions such as extreme temperatures, oil stains, dust, and vibrations. It is an ideal choice for industrial control, terminal equipment, and human-machine interaction (HMI).

## Features


- Aluminum alloy enclosure, easy embedded design
- IP65 protected flat front panel
- High precision aluminum alloy material.
- Industrial grade components
- Capacitive/resistive/non-touch
- HDMI/VGA/DP for display high compatibility




## Model

Product size	21.5"
Non-touch	215-M2800
Capacitive touch	215-M2810
Resistive touch	215-M2820

## I/O Interface

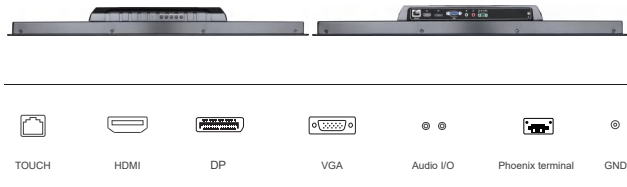

## Dimension

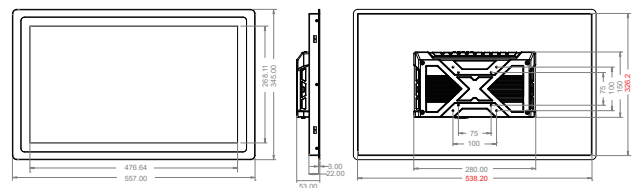

### Physical Characteristic

Overall dimensions	W557x H345x D53mm
Installation size	W540.2 x H328.2mm
Material	Aluminum alloy
Color	Black, optional silver
Installation	Supports Panel-mount/Wall-embedded/Wall-mounted/Desktop/Folding mounting/VESA mount/Suspended mounting, etc.

## Specification

### Screen Parameter

Display type	21.5" TFT LCD screen		
MAX.resolution	1920*1080 (16:9)		
Viewing angle(H/V)	89/89/89/89 (L/R/U/D)		
Luminance (cd/m <sup>2</sup> )	250~300 cd/m <sup>2</sup>		
Contrast ratio	1000:1		

### Touch Parameter

Touchscreen	Projection capacitive touch 10-point multi touch	Resistive touch single point	Non-touch
Light transmission	≥88%	≥78%	≥92%
Controller	USB ( COM customized)	USB ( COM customized)	/

### Configuration

CPU	RTD2513
Key function	AUTO/MENU/POWER/LEFT/RIGHT
System language	Multilingual (default: English)
Video input	PC-RGB:Format Up to 1920*1080@60Hz Color 16bit/24bit/32bit

### Power Parameter

Power input	DC 12V-36V
-------------	------------

### Interface Parameter

Phoenix terminal	1*2Pin Phoenix terminal (Optional with thread DC 5.5*2.1)
HDMI	1*HDMI, Support HDMI data input, With a maximum of 1080P
Touch interface	1*RJ45 port (USB defined) comes standard with RJ45 to USB touch cable
VGA	1*VGA, Analog signal transmission
DP	1*DP
Audio interface	1*Audio I/O, Support audio input and output
Grounding	1*GND

### Reliability Parameter

Operating temperature	-10°C~60°C (-20°C~70°C can be customized)
Storage temperature	-20°C~70°C
Relative humidity	95% non-condensing

Power adapter	24V/1.5A
---------------	----------